

APP CRS	Rwy Idg	5152
215°	TDZE	1372
	Apt Elev	1372


RNAV (GPS) RWY 21

LIVINGSTON MUNI (8A.3)

NA DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Crossville altimeter setting and increase all MDA 140 feet; and LNAV Cat C/D visibilities ½ mile, Circling Cat B visibility ¼ mile and Circling Cat C/D visibilities ½ mile.




MISSED APPROACH: Climb to 4100 direct LAZMU and hold.

AWOS-3 126.175	INDIANAPOLIS CENTER 124.625 371.925	UNICOM 122.8 (CTAF)
--------------------------	---	-------------------------------

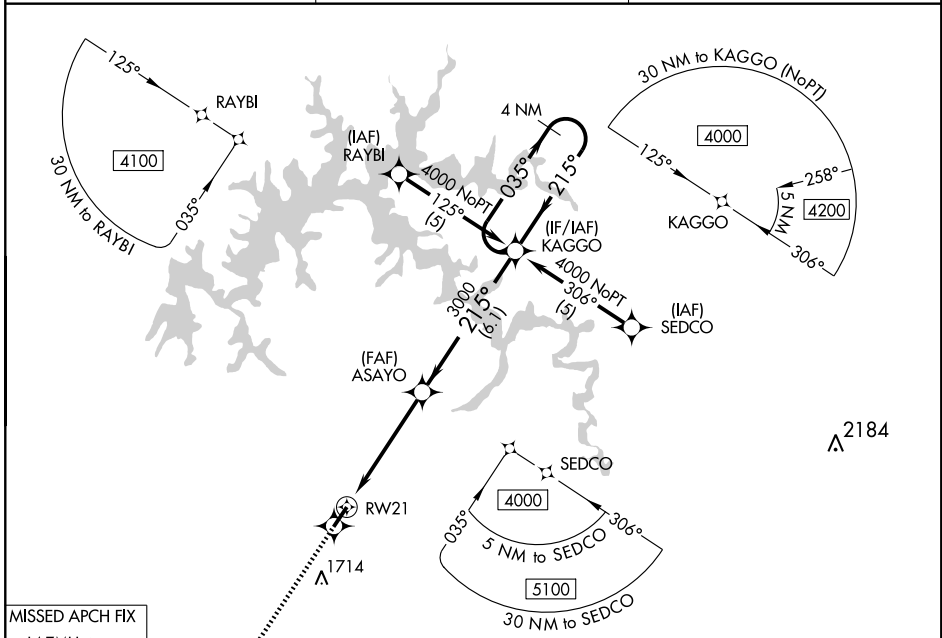

SE-1, 31 MAY 2012 to 28 JUN 2012

SE-1, 31 MAY 2012 to 28 JUN 2012

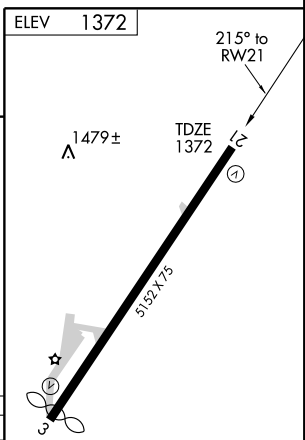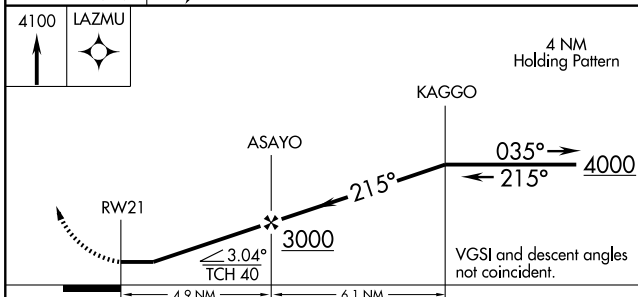

CATEGORY	A	B	C	D
LNAV MDA	1760-1	388 (400-1)		1760-1¼ 388 (400-1¼)
CIRCLING	1860-1 488 (500-1)	2080-1 708 (800-1)	2080-2 708 (800-2)	2080-2¼ 708 (800-2¼)

MIRL Rwy 3-21
REIL Rwy 3 and 21

APP CRS	Rwy Idg	5152
035°	TDZE	1366
	Apt Elev	1372


RNAV (GPS) RWY 3

LIVINGSTON MUNI (8A.3)

NA DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Crossville altimeter setting and increase all MDA 140 feet, and increase LNAV Cat C/D visibilities ½ mile, Circling Cat B visibility ¼ mile and Circling Cat C/D visibilities ½ mile.



MISSED APPROACH: Climb to 4000 direct KAGGO and hold.

AWOS-3 126.175	INDIANAPOLIS CENTER 124.625 371.925	UNICOM 122.8 (CTAF)
---------------------------------	--	--------------------------------------

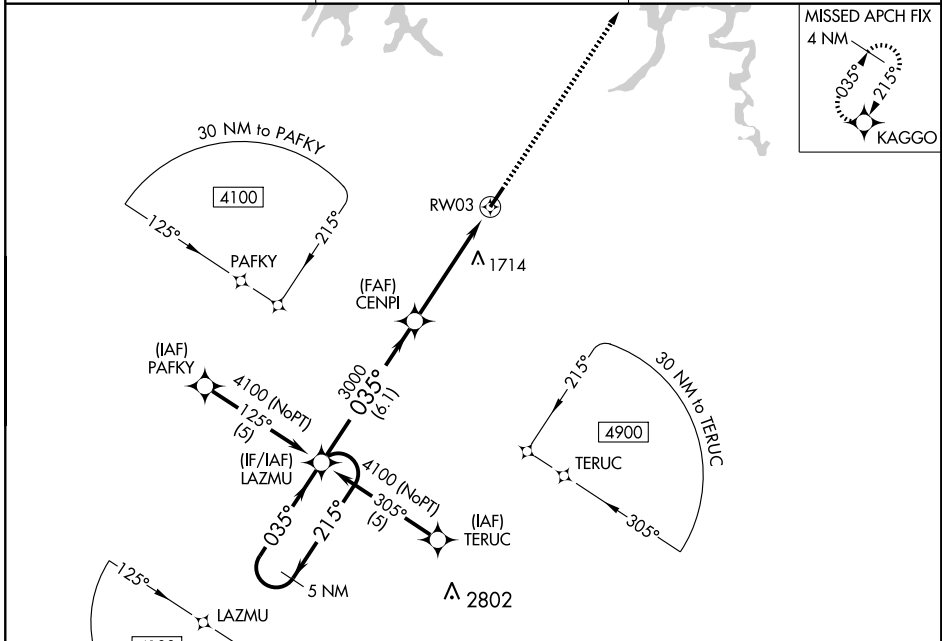


SE-1, 31 MAY 2012 to 28 JUN 2012

SE-1, 31 MAY 2012 to 28 JUN 2012

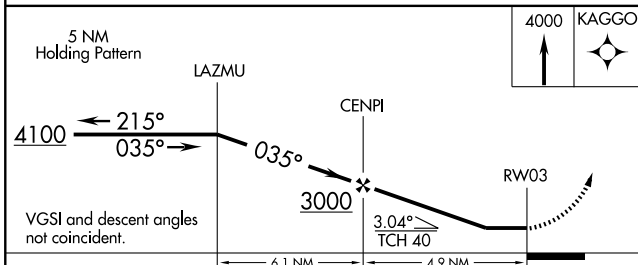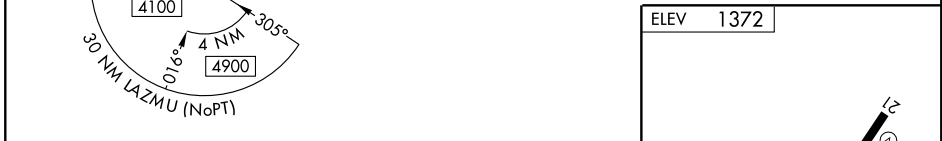

CATEGORY	A	B	C	D
LNAV MDA	1960-1	594 (600-1)	1960-1½ 594 (600-1½)	1960-1¾ 594 (600-1¾)
CIRCLING	1960-1 588 (600-1)	2080-1 708 (800-1)	2080-2 708 (800-2)	2080-2¼ 708 (800-2¼)

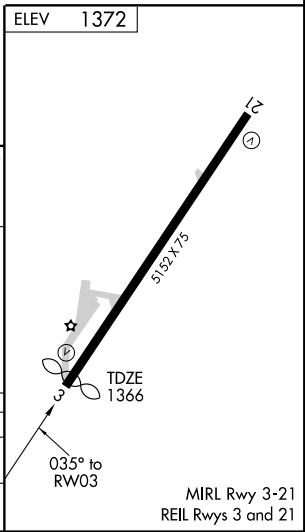

VORTAC LVT 108.4 Chan 21	APP CRS 216°	Rwy Idg TDZE 1372 Apt Elev 1372
--	------------------------	---



VOR/DME RWY 21

LIVINGSTON MUNI (8A.3)

NA Visibility reduction by helicopters NA. When local altimeter setting not received, use Crossville altimeter setting and increase all MDA 140 feet and increase S-21 Cat C visibility 1/4 mile, S-21 Cat D visibility and Circling Cat C/D visibilities 1/2 mile.


MISSED APPROACH: Climbing right turn to 4000 direct LVT VORTAC and hold.

AWOS-3 126.175	INDIANAPOLIS CENTER 124.625 371.925	UNICOM 122.8 (CTAF)
--------------------------	---	-------------------------------

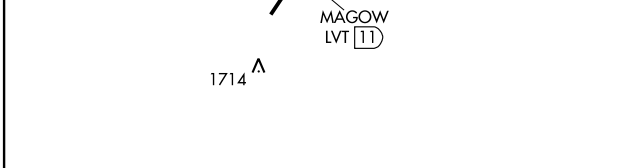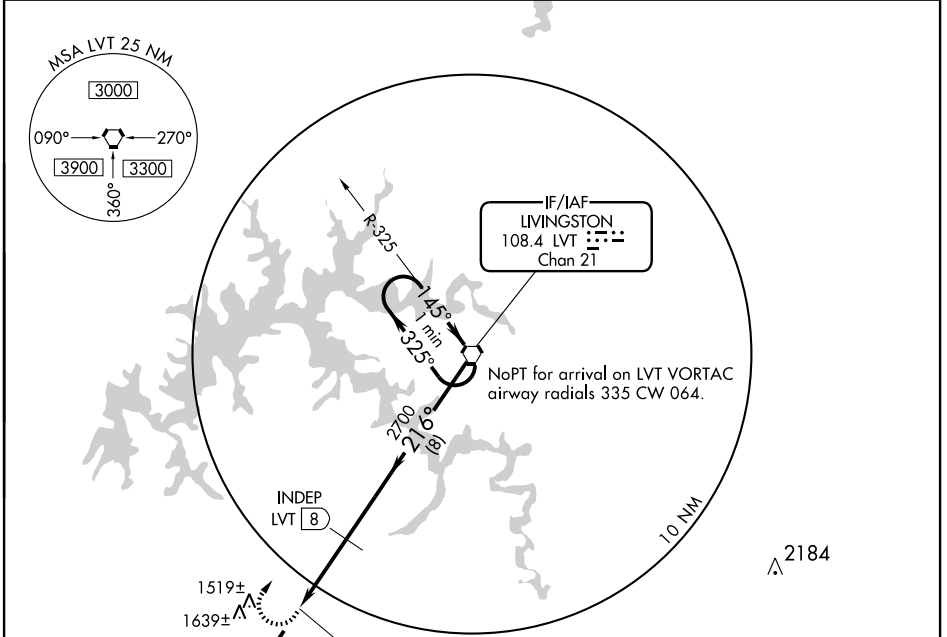

4000	LVT 108.4	INDEP LVT 8	VORTAC	One Minute Holding Pattern
MAGOW LVT 11		VGSIs and descent angles not coincident.		

CATEGORY	A	B	C	D
S-21	1880-1¼	508 (600-1¼)	1880-1½	508 (600-1½)
CIRCLING	1880-1¼ 508 (600-1¼)	2080-1¼ 708 (800-1¼)	2080-2 708 (800-2)	2080-2¼ 708 (800-2¼)

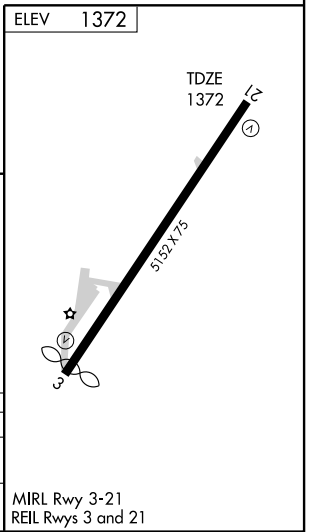

SE-1, 31 MAY 2012 to 28 JUN 2012

SE-1, 31 MAY 2012 to 28 JUN 2012