LOC I-ANB	APP CRS	Rwy Idg	7000
111.5	049°	THRE	595
		Apt Elev	612

ILS or LOC RWY 5

ANNISTON RGNL (ANB)

ADF Required. When local altimeter setting not received, use Gadsden altimeter setting and increase all DA to 975 and all MDA 80 feet, increase S-ILS 5 all Cats, S-LOC 5 Cat C and D and Circling Cat A, C, and D visibility ¼ mile. For inop MALSR increase S-ILS 5 all Cats visibility to 1. For inop MALSR when using Gadsden altimeter setting, increase S-ILS 5 all Cats visibility to 1¼. Circling NA north of Rwy 5-23.

MALSR

MISSED APPROACH: Climb to 1600 then climbing right turn to 4000 via heading 110° then via AN LOM 260° course to BOGGA LOM/INT and hold.

ASOS	BIRMINGHAM APP CON	CTAF	UNICOM
119.675	125.45 381.5	123.6 L	123.0

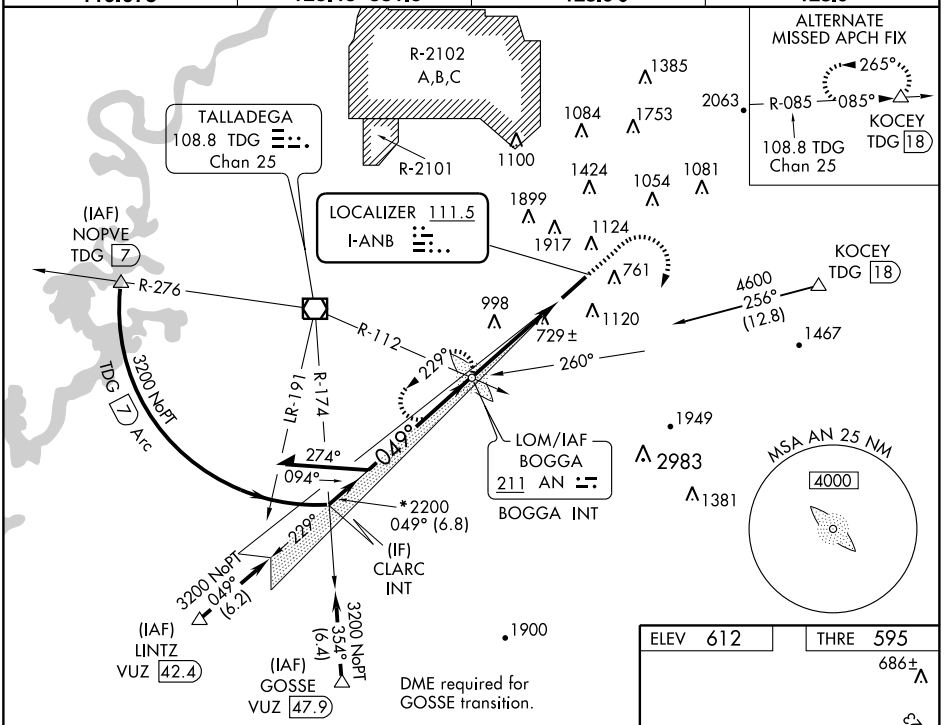

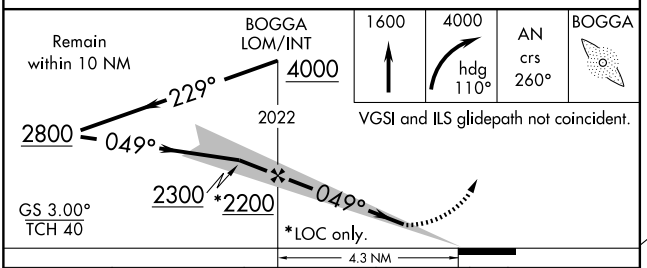

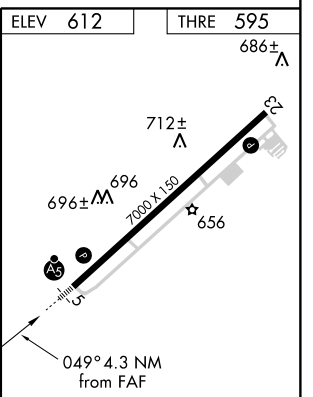

CATEGORY	A	B	C	D
S-ILS 5	909-½ 314 (300-½)			
S-LOC 5	1120-½ 525 (600-½)		1120-1 525 (600-1)	
CIRCLING	1480-1 868 (900-1)	1480-1¼ 868 (900-1¼)	1480-2½ 868 (900-2½)	1480-2¾ 868 (900-2¾)

FAF to MAP 4.3 NM

Knots	60	90	120	150	180
Min:Sec	4:18	2:52	2:09	1:43	1:26

SE-4, 31 MAY 2012 to 28 JUN 2012
SE-4, 31 MAY 2012 to 28 JUN 2012