RNAV (GPS) RWY 16

ASHEVILLE RGNL (AVL)

WAAS	APP CRS		
CH 90501 W16A	164°	Rwy Idg	8001
		TDZE	2165
		Apt Elev	2165

ASR

Circling NA West of runway 16/34. Circling NA at night. For inoperative MALSR, increase LPV all Cats visibility to RVR 4000, increase LNAV Cat A visibility to RVR 5000. If local altimeter setting not received, use Rutherfordton altimeter setting and increase all DA/MDAs 240 feet. VDP NA when using Rutherfordton altimeter setting. DME/DME RNP-0.3 NA.

MALSR

MISSED APPROACH: Climb to 5000 direct QUBSO and via 164° track to TUXDO and hold.

ATIS	ASHEVILLE APP CON	ASHEVILLE TOWER★	GND CON	UNICOM
120.2	124.65 269.575	121.1 (CTAF) L 257.8	121.9	122.95

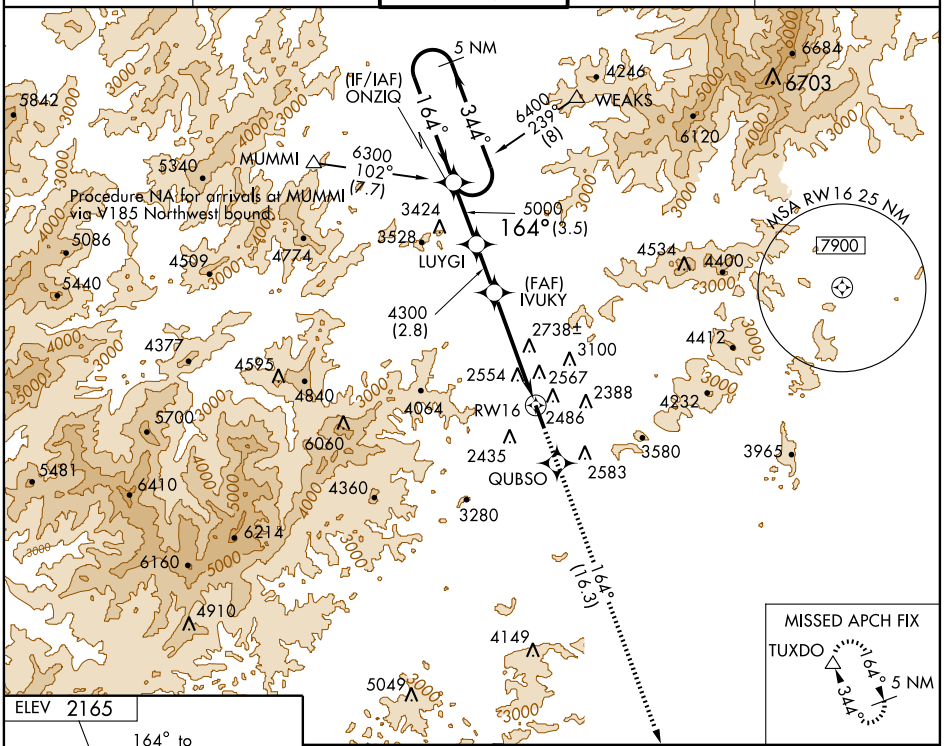

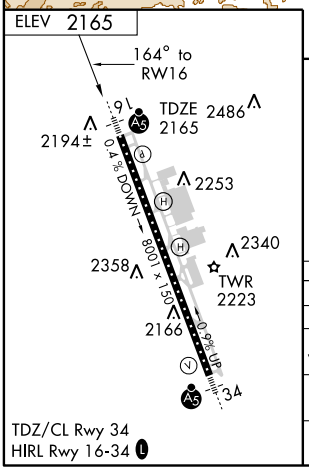

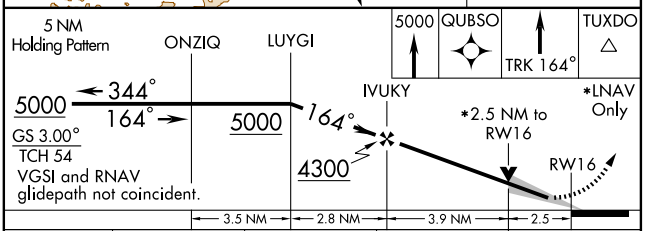

CATEGORY	A	B	C	D
LPV DA	2415/24 250 (300-½)			
LNAV/VNAV DA	NA			
LNAV MDA	3020/40 855 (900-¾)		3020-2 855 (900-2)	3020-2¼ 855 (900-2¼)
CIRCLING	3020-1 855 (900-1)	3020-1¼ 855 (900-1¼)	3020-2½ 855 (900-2½)	3020-2¾ 855 (900-2¾)

SE-2, 31 MAY 2012 to 28 JUN 2012
SE-2, 31 MAY 2012 to 28 JUN 2012