

WAAS CH 50501 W34A	APP CRS 344°	Rwy ldg TDZE Apt Elev	8001 2140 2165
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 34

ASHEVILLE RGNL (AVL)

▼ Circling NA West of Rwy 16/34. Circling NA at night. If local altimeter setting not received, use Rutherfordton altimeter setting and increase all DA/MDAs 240 feet. VDP NA with Rutherfordton altimeter setting. For inoperative MALSR, increase LPV all Cats visibility to RVR 5000. DME/DME RNP-0.3 NA.

MALSR MISSED APPROACH: Climb to 5000 direct ONZIQ and hold.

ATIS 120.2	ASHEVILLE APP CON 124.65 269.575	ASHEVILLE TOWER* 121.1(CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
----------------------	--	--	-------------------------	-------------------------


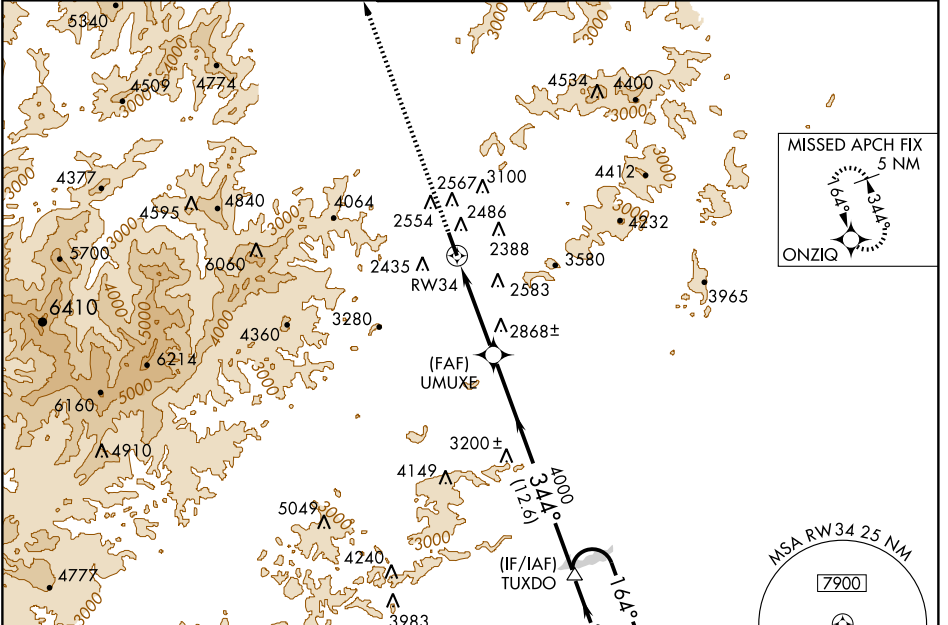


SE-2, 31 MAY 2012 to 28 JUN 2012

SE-2, 31 MAY 2012 to 28 JUN 2012

ELEV 2165	TDZE 2140
-----------	-----------

NoPT for arrivals at TUXDO via V20-35 Northeast bound.

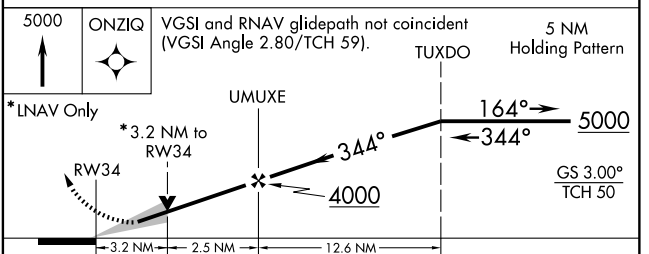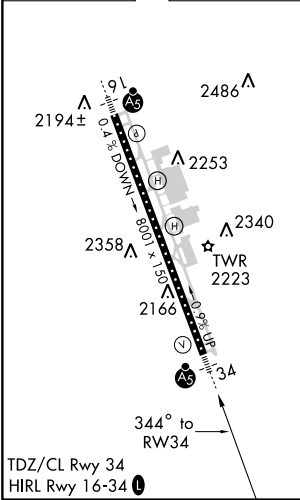

CATEGORY	A	B	C	D
LPV DA	2390/24 250 (300-1/2)			
LNAV/VNAV DA	NA			
LNAV MDA	3120/40 980 (1000-3/4)	3120/50 980 (1000-1)	3120-2 1/2	980 (1000-2 1/2)
CIRCLING	3120-1 1/4 955 (1000-1 1/4)	3120-1 1/2 955 (1000-1 1/2)	3120-3 955 (1000-3)	