

WAAS CH 56511 W36A	APP CRS 001°	Rwy Idg 7800 TDZE 26 Apt Elev 26
--	------------------------	---


RNAV (GPS) RWY 36

MOBILE DOWNTOWN (BFM)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Mobile Rgnl altimeter setting and increase all DA 50 feet and all MDA 60 feet, increase LPV, LNAV/VNAV all Cats., LNAV Cat. D and Circling Cats. C and D visibility ¼ mile. Baro-VNAV and VDP NA when using Mobile Rgnl altimeter setting.



⚠ MISSED APPROACH: Climb to 2000 direct OTMEE and hold.

ATIS 135.575	MOBILE APP CON ★ 118.5 269.3	DOWNTOWN TOWER ★ 118.8 (CTAF) 0 251.1	GND CON 121.7 239.3	UNICOM 122.95
------------------------	--	---	-------------------------------	-------------------------

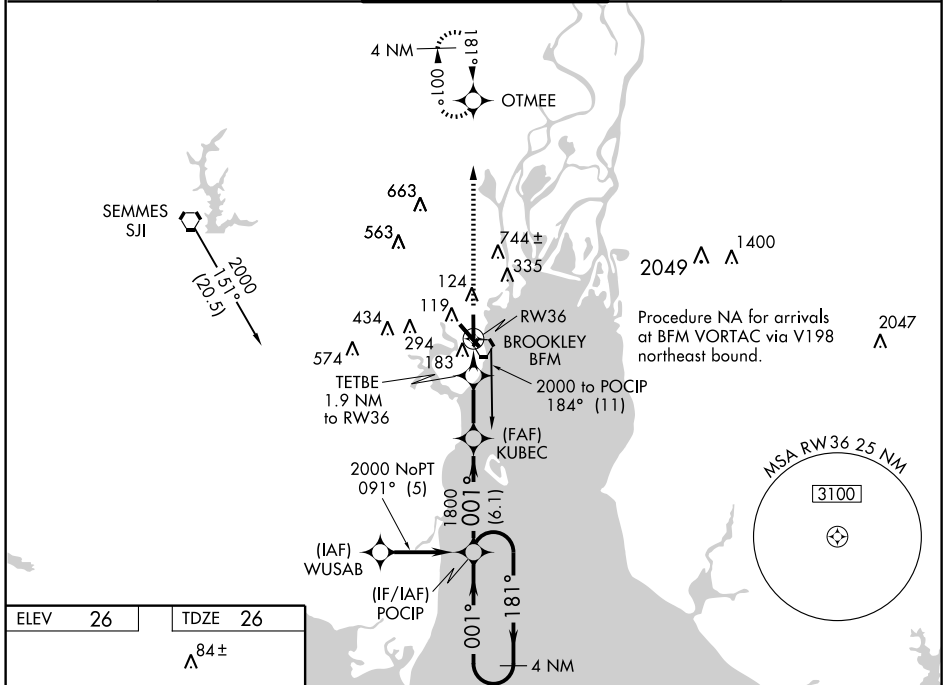

SE-4, 31 MAY 2012 to 28 JUN 2012

SE-4, 31 MAY 2012 to 28 JUN 2012

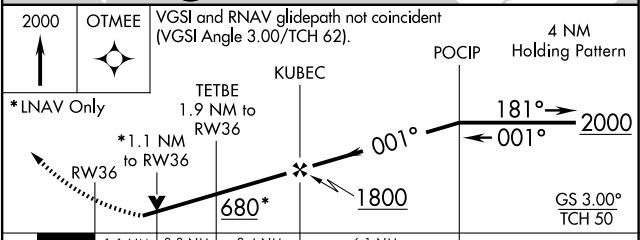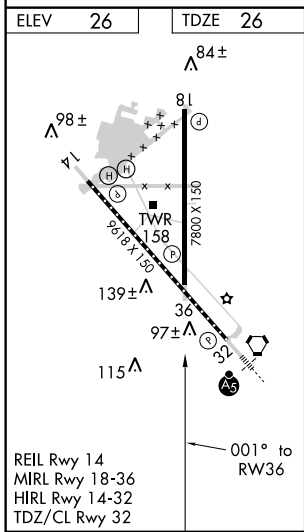

CATEGORY	A	B	C	D
LPV DA		340-1	314 (400-1)	
LNAV/VNAV DA		586-2	560 (600-2)	
LNAV MDA	440-1	414 (500-1)	440-1¼	414 (500-1¼)
CIRCLING	680-1	654 (700-1)	680-1¾	654 (700-1¾)
			680-2	654 (700-2)