WAAS CH 93820 W10A	APP CRS 098°	Rwy ldg 5001 THRE 1591 Apt Elev 1636

RNAV (GPS) RWY 10

BINGHAMTON/GREATER BINGHAMTON/EDWIN A. LINK FIELD (BGM)

Baro-VNAV NA when using Ithaca altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 33°C (91°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Ithaca altimeter setting and increase all DA 138 feet and all MDA 140 feet; increase LPV all Cats and LNAV Cats C/D visibility ⅜ mile, LNAV/VNAV all Cats visibility ½ mile and Circling Cats C/D visibility ¼ mile. VDP NA with Ithaca altimeter setting.

MISSED APPROACH: Climb to 4200 direct IPIPE and hold.

ATIS	BINGHAMTON APP CON ★	BINGHAMTON TOWER ★	GND CON	CLNC DEL	UNICOM
128.15	118.6 257.625	119.3 (CTAF) L 239.25	121.9	125.05	122.95

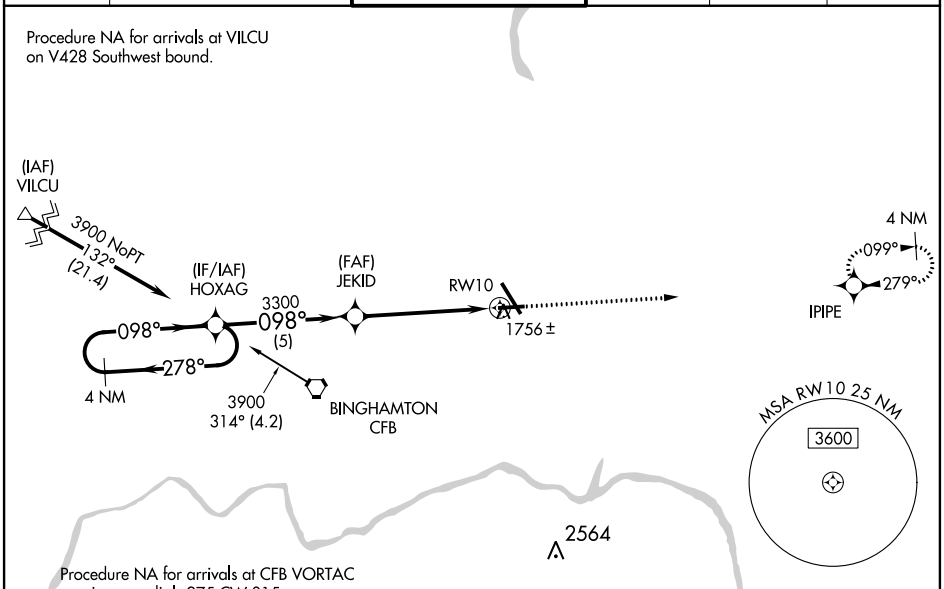

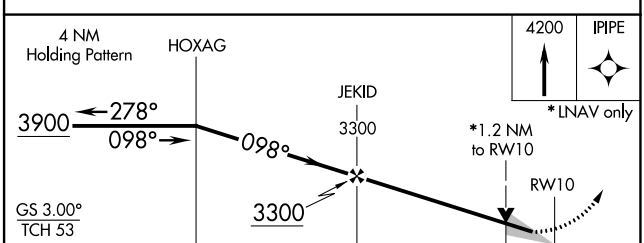

CATEGORY	A	B	C	D
LPV DA	1791-¾ 200 (200-¾)			
LNAV/VNAV DA	1917-1 326 (300-1)			
LNAV MDA	2020-1 429 (400-1)		2020-1¼ 429 (400-1¼)	
CIRCLING	2120-1 484 (500-1)		2120-1½ 484 (500-1½)	2200-2 564 (600-2)

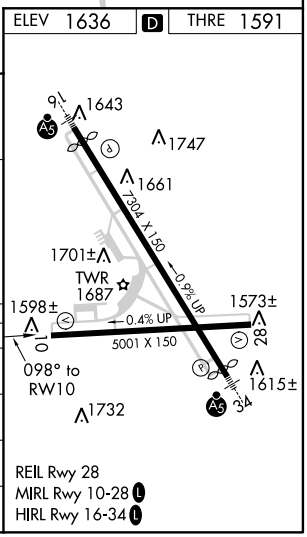

NE-2, 12 DEC 2013 to 09 JAN 2014
NE-2, 12 DEC 2013 to 09 JAN 2014