




LOC/DME I-SSX 109.35 Chan 30 (Y)	APP CRS 201°	Rwy Ldg TDZE 8000 551 Apt Elev 599
---	------------------------	---

ILS or LOC RWY 20L

NASHVILLE INTL (BNA)

<p>Simultaneous approach authorized with Rwy 20R. DME or radar required. ** RVR 1800 authorized with the use of FD or AP or HUD to DA.</p>	<p>MALSR</p>	<p>MISSED APPROACH: Climb to 1300 then climbing left turn to 3000 via BNA VORTAC R-072 to LENON INT/BNA 25.1 DME and hold.</p>
--	--------------	--

ATIS 135.1	NASHVILLE APP CON 200°-018° 120.6 372.0 019°-199° 127.175 360.7	NASHVILLE TOWER 118.6 257.8	GND CON 121.9 348.6	CLNC DEL 126.05
----------------------	---	---------------------------------------	-------------------------------	---------------------------

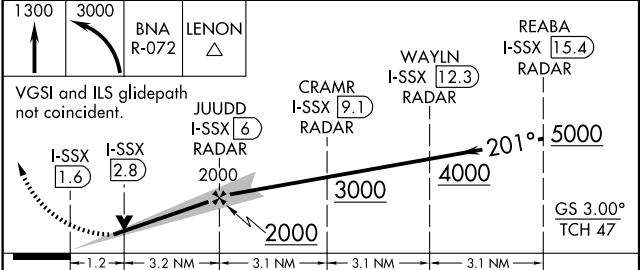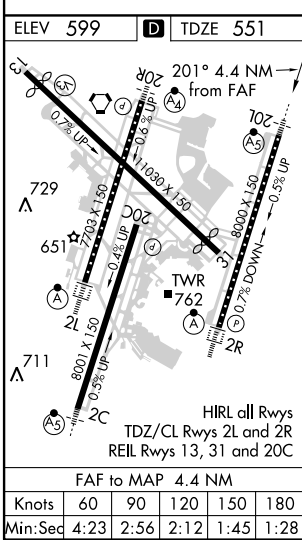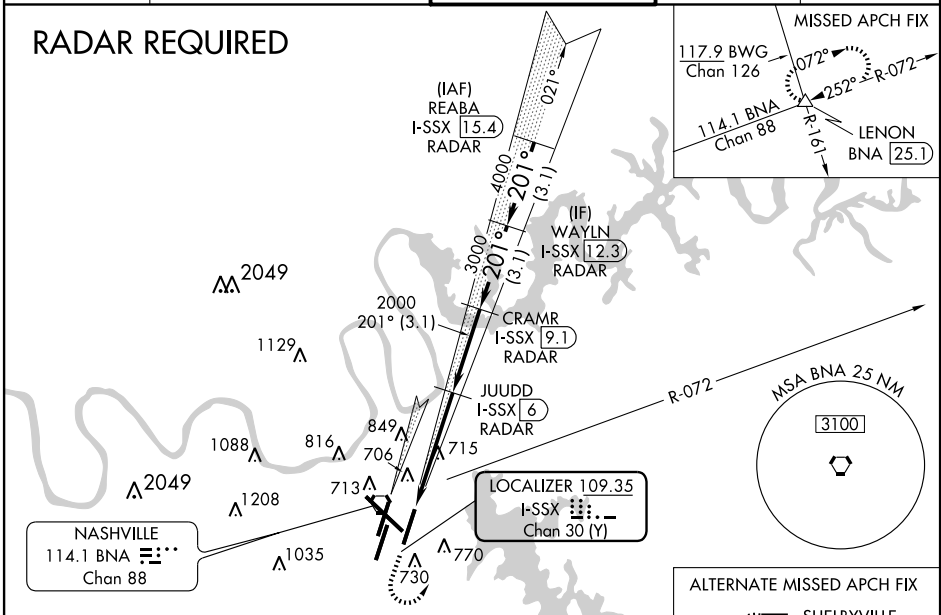

CATEGORY	A	B	C	D
S-ILS 20L	** 751/24 200 (200-1/2)			
S-LOC 20L	980/24	429 (400-1/2)	980/40 429 (400-3/4)	980/50 429 (400-1)
CIRCLING	1100-1	501 (600-1)	1120-1 1/2 521 (600-1 1/2)	1160-2 561 (600-2)

SE-1, 31 MAY 2012 to 28 JUN 2012

SE-1, 31 MAY 2012 to 28 JUN 2012