RNAV (RNP) Z RWY 31

NASHVILLE INTL (BNA)

APP CRS	Rwy Idg	9487
316°	TDZE	577
	Apt Elev	599

GPS Required. For uncompensated Baro-VNAV systems, procedure NA below -12°C (11°F) or above 47°C (118°F). *RNP 0.25 missed approach requires minimum climb of 423 feet per NM to 1100. RNP 0.25 minimums NA at night.

MISSED APPROACH: Climb to 3100 via track 316° to JARAS and hold.

ATIS	NASHVILLE APP CON	NASHVILLE TOWER	GND CON	CLNC DEL
135.1	200°-018° 120.6 372.0 019°-199° 127.175 360.7	118.6 257.8	121.9 348.6	126.05

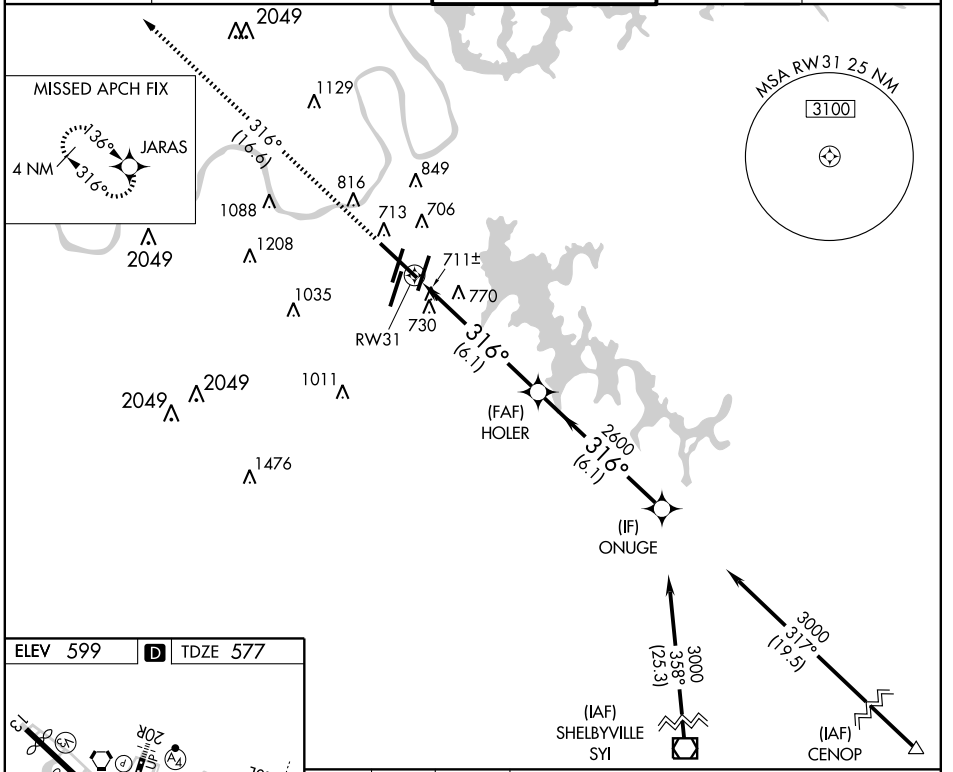

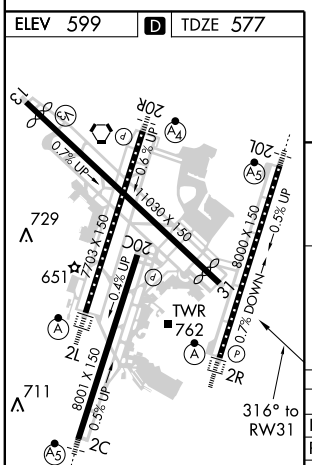

HIRL all Rwys
TDZ/CL Rwys 2L and 2R
REIL Rwys 13, 31 and 20C

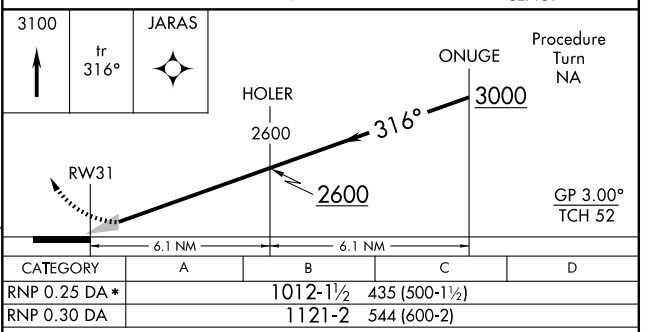

CATEGORY	A	B	C	D
RNP 0.25 DA*	1012-1½ 435 (500-1½)			
RNP 0.30 DA	1121-2 544 (600-2)			

AUTHORIZATION REQUIRED

SE-1, 31 MAY 2012 to 28 JUN 2012
SE-1, 31 MAY 2012 to 28 JUN 2012