WAAS CH 77511 W23A	APP CRS 235°	Rwy ldg 7567 THRE 726 Apt Elev 727

RNAV (GPS) RWY 23
BUFFALO NIAGARA INTL (BUF)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 39°C (102°F). DME/DME RNP-0.3 NA.

ALSF-2

MISSED APPROACH: Climb to 3000 direct WABUS and hold.

ATIS	BUFFALO APP CON	BUFFALO TOWER	GND CON	CLNC DEL
135.35	126.15 263.125	120.5 257.8	133.2 257.8	124.7 257.8

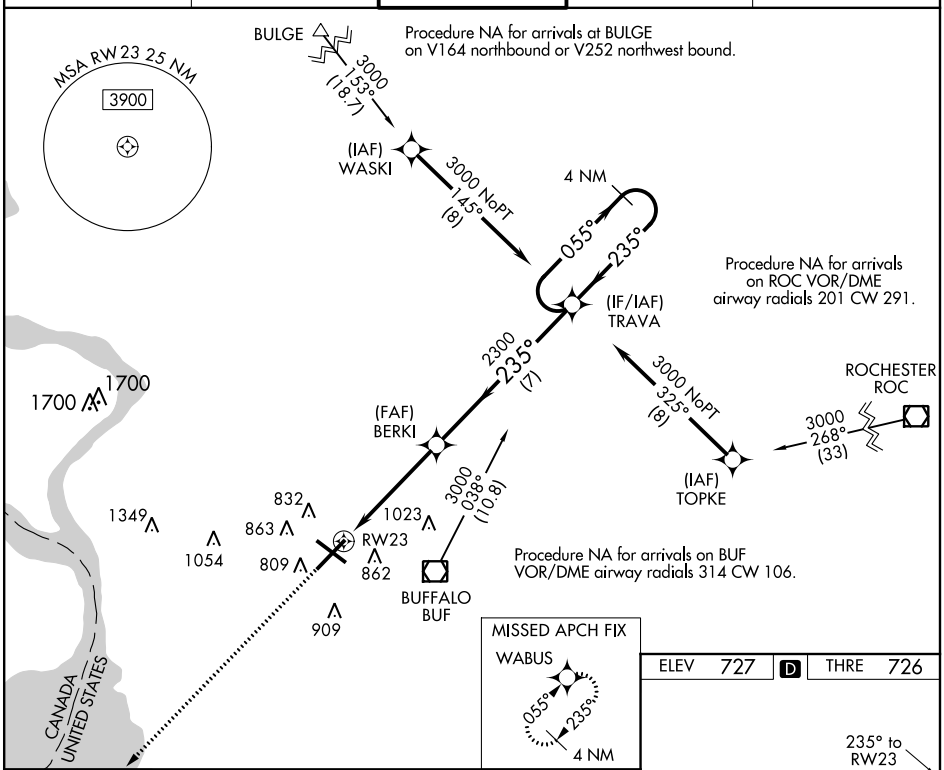

NE-2, 21 AUG 2014 to 18 SEP 2014

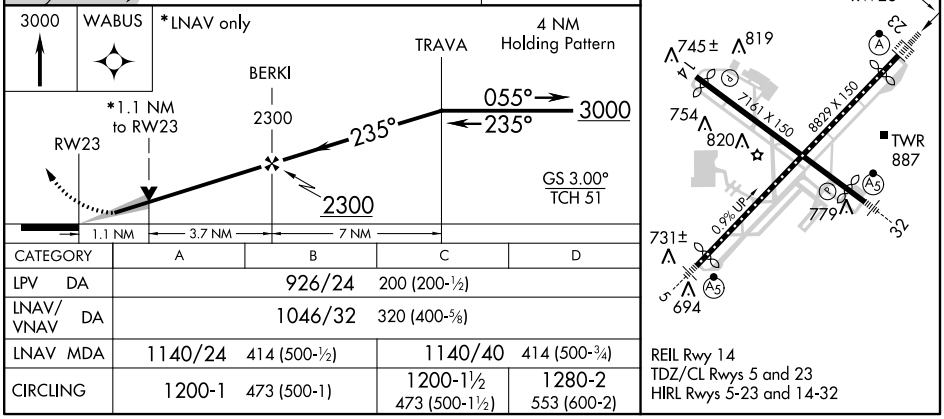

CATEGORY	A	B	C	D
LPV DA	926/24 200 (200-½)			
LNAV/VNAV DA	1046/32 320 (400-⅝)			
LNAV MDA	1140/24 414 (500-½)		1140/40 414 (500-¾)	
CIRCLING	1200-1 473 (500-1)		1200-1½ 473 (500-1½)	1280-2 553 (600-2)