WAAS	APP CRS	Rwy Idg	10002
CH 48808	285°	TDZE	142
W28A		Apt Elev	146

BALTIMORE/ RNAV (GPS) Y RWY 28
WASHINGTON INTL THURGOOD MARSHALL (BWI)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). Inoperative table does not apply to LNAV Cat D. DME/DME RNP-0.3 NA.

MALSR

MISSED APPROACH: Climb to 2500 direct COLUM and hold.

ATIS	POTOMAC APP CON	BALTIMORE TOWER	GND CON	CLNC DEL
115.1 127.8	119.7 290.475	119.4 257.8	121.9	118.05

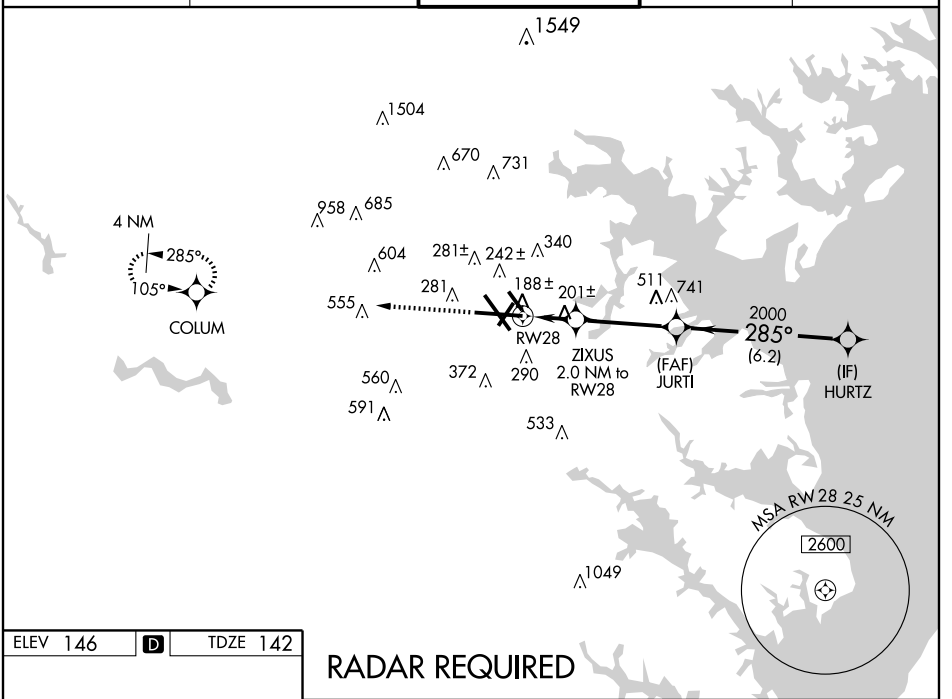

ELEV 146 | D | TDZE 142



TDZ/CL Rwys 10 and 33L
REIL Rwys 15L and 33R
HIRL all rwys

RADAR REQUIRED

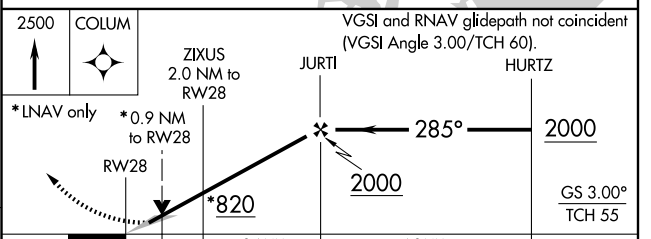

CATEGORY	A	B	C	D
LPV DA	342/24 200 (200-½)			
LNAV/ VNAV DA	567/50 425 (500-1)			
LNAV MDA	480/24 338 (400-½)			480/50 338 (400-1)
CIRCLING	640-1 494 (500-1)		640-1½ 494 (500-1½)	740-2 594 (600-2)

NE-3, 31 MAY 2012 to 28 JUN 2012
NE-3, 31 MAY 2012 to 28 JUN 2012