WAAS CH 86809 W27A	APP CRS 274°	Rwy ldg 12000 TDZE 875 Apt Elev 896

RNAV (GPS) Y RWY 27
COVINGTON/CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4° F) or above 47° C (116° F). DME/DME RNP-0.3 NA.

MALSR

MISSED APPROACH: Climb to 3000 direct SEMSE then via 218° track to AVIEW and hold.

ATIS ARR	ATIS DEP	CINCINNATI APP CON	CINCINNATI TOWER	GND CON	CLNC DEL
134.375	135.3	119.7 254.25 (090°- 269°) 123.875 363.15 (270°- 089°)	118.975 360.85 (RWY 18L/36R) 118.3 (RWYS 18C/36C, 09/27) 133.325 (RWY 18R/36L)	121.7 (WEST) 121.3 (EAST)	127.175

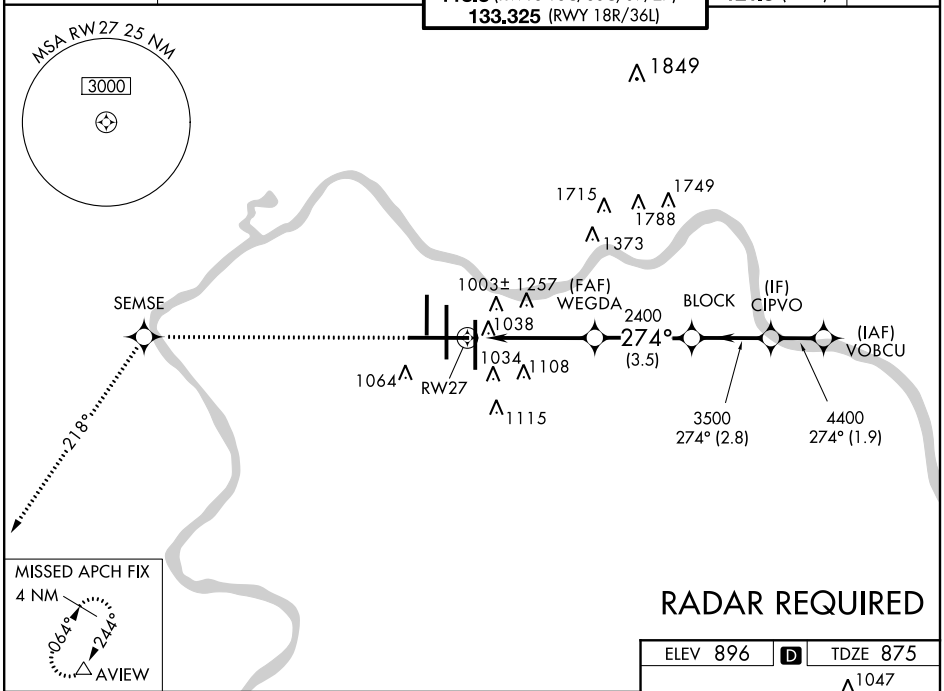

RADAR REQUIRED

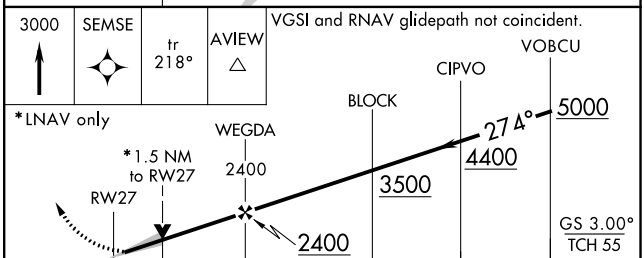



CATEGORY	A	B	C	D
LPV DA	1075/24 200 (200-½)			
LNAV/VNAV DA	1349/60 474 (500-1¼)			
LNAV MDA	1420/24 545 (600-½)		1420/50 545 (600-1)	1420/60 545 (600-1¼)
CIRCLING	1460-1 564 (600-1)		1460-1½ 564 (600-1½)	1560-2 664 (700-2)

HIRL all Rwys
TDZ/CL all Rwys except 9-27

SE-1, 06 MAR 2014 to 03 APR 2014
SE-1, 06 MAR 2014 to 03 APR 2014