RNAV (GPS) Y RWY 27

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

WAAS	APP CRS	Rwy Idg	12000
CH 86809	274°	TDZE	875
W27A		Apt Elev	896

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4° F) or above 47° C (116° F). DME/DME RNP-0.3 NA.
**RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3000 direct SEMSE then via 218° track to AVIEW and hold.

D-ATIS		CINCINNATI APP CON	CINCINNATI TOWER	GND CON	CLNC DEL
ARR	DEP	119.7 254.25 (090°-269°)	118.975 360.85 (RWY 18L/36R)	121.7	127.175
134.375	135.3	123.875 363.15 (270°-089°)	118.3 (RWYS 18C/36C, 09/27)		
			133.325 (RWY 18R/36L)		

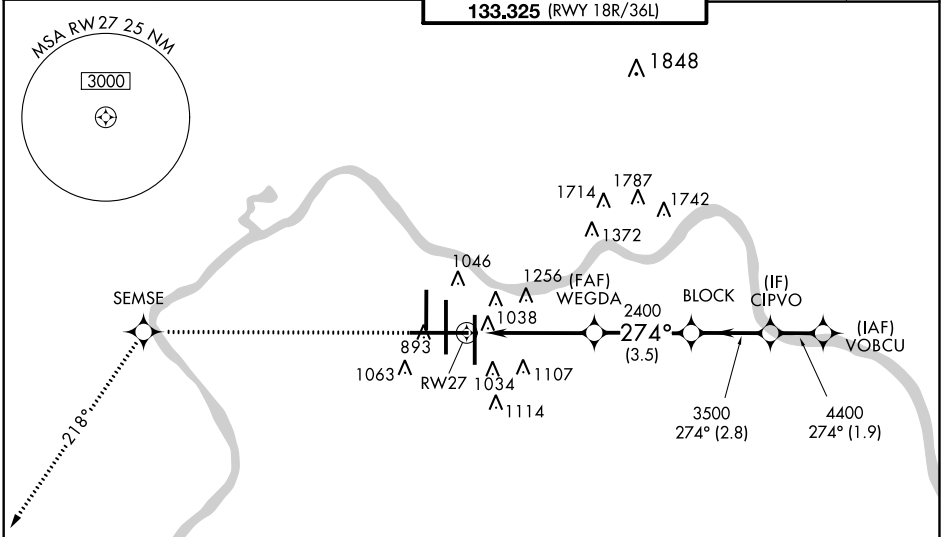

MISSED APCH FIX
4 NM
064°
244°
AVIEW

RADAR REQUIRED

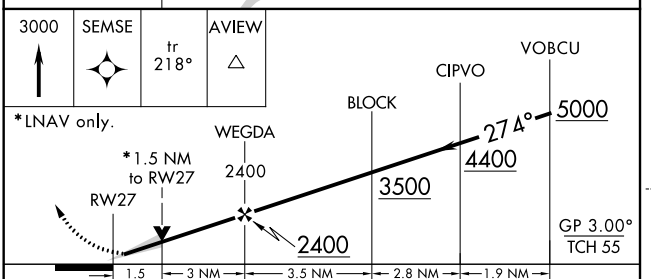

CATEGORY	A	B	C	D
LPV DA		**1075/24 200 (200-½)		
LNAV/VNAV DA		1349/60 474 (500-1¼)		
LNAV MDA	1420/24 545 (600-½)		1420/60 545 (600-1¼)	
CIRCLING	1460-1 564 (600-1)		1460-1½ 564 (600-1½)	1560-2 664 (700-2)

ELEV 896 D TDZE 875

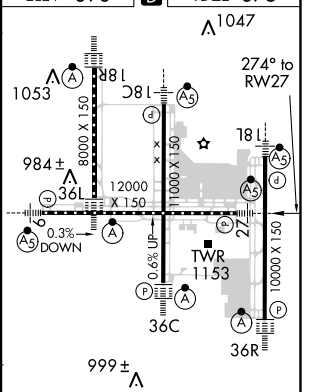

HIRL all Rwys
TDZ/CL all Rwys except 27

SE-1, 09 NOV 2017 to 07 DEC 2017
SE-1, 09 NOV 2017 to 07 DEC 2017