

WAAS CH 49099 W36A	APP CRS 004°	Rwy Idg TDZE Apt Elev	8000 873 896
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 36L

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)


▽ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized with Rwy 36C/R. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSIF-2



MISSED APPROACH: Climb to 3000 direct KRTHY and via 327° track to BATHY and hold.

D-ATIS ARR 134.375 DEP 135.3	CINCINNATI APP CON 119.7 254.25 (090°-269°) 123.875 363.15 (270°-089°)	CINCINNATI TOWER 118.975 360.85 (RWY 18L/36R) 118.3 (RWYS 18C/36C, 09/27) 133.325 (RWY 18R/36L)	GND CON 121.7	CLNC DEL 127.175
---	--	---	-------------------------	----------------------------

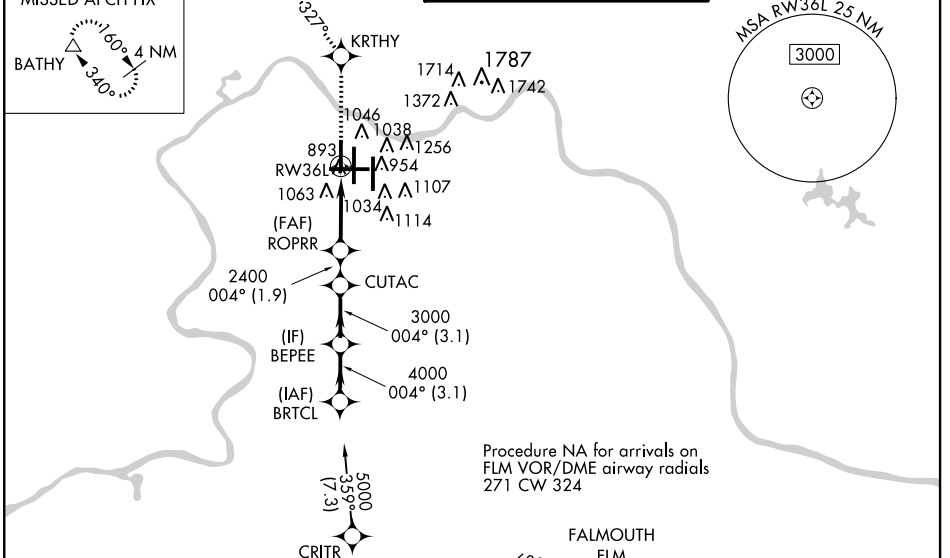

SE-1, 27 APR 2017 to 25 MAY 2017

SE-1, 27 APR 2017 to 25 MAY 2017

Procedure Turn NA	GP 3.00° TCH 55	3.1 NM	3.1 NM	1.9 NM	3.4 NM	1.2 NM
CATEGORY	A	B	C	D		
LPV DA	1073/24		200 (200-½)			
LNAV/VNAV DA	1383/60		510 (500-1¼)			
LNAV MDA	1300/24	427 (500-½)	1300/40 427 (500-¾)	1300/50 427 (500-1)		
CIRCLING	1460-1	564 (600-1)	1460-1½ 564 (600-1½)	1560-2 664 (700-2)		

