LOC I-EGK	APP CRS	Rwy Idg	7001
110.3	239°	TDZE	1006
		Apt Elev	1009

ILS or LOC RWY 24L

DAYTON/JAMES M. COX DAYTON INTL (DAY)

ASR

*RVR 1800 authorized with the use of FD or AP or HUD to DA. Simultaneous approach authorized with Rwy 24R.

MALSR

MISSED APPROACH: Climb to 3000 via heading 239° and DQN VOR/DME R-180 to MIMMS Int and hold.

ATIS	COLUMBUS APP CON	DAYTON TOWER	GND CON	CLNC DEL
125.8	118.425 294.5	119.9 257.8	121.9	121.75

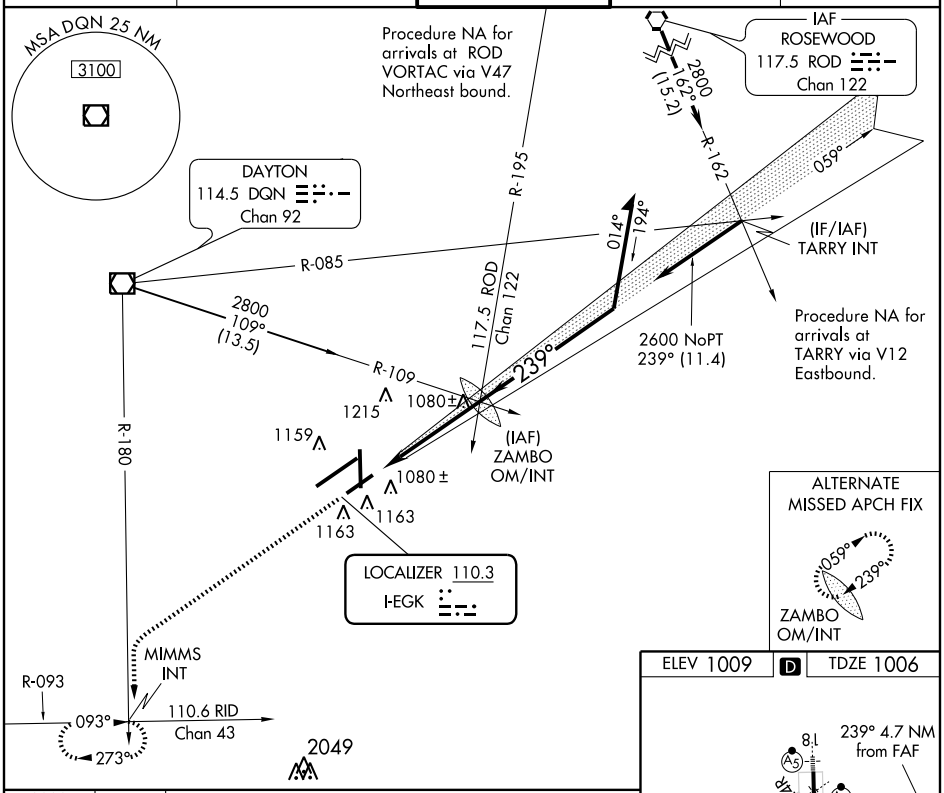

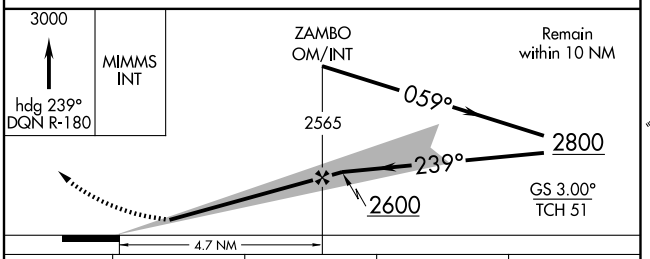



CATEGORY	A	B	C	D
S-ILS 24L	*1206/24 200 (200-½)			
S-LOC 24L	1500/24 494 (500-½)		1500/40 494 (500-¾)	1500/50 494 (500-1)
CIRCLING	1560-1 551 (600-1)		1560-1½ 551 (600-1½)	1560-2 551 (600-2)

HIRL all Rwys
TDZ/CL Rwy 6L
REIL Rwys 6R and 36

FAF to MAP 4.7 NM					
Knots	60	90	120	150	180
Min:Sec	4:42	3:08	2:21	1:53	1:34

EC-2, 31 MAY 2012 to 28 JUN 2012
EC-2, 31 MAY 2012 to 28 JUN 2012