

WAAS CH 48918 W35A	APP CRS 355°	Rwy Idg TDZE Apt Elev	5001 690 699
----------------------------------------	------------------------	-----------------------------	-----------------------------------------

RNAV (GPS) RWY 35

DURANT RGNL - EAKER FIELD (DUA)


⚠ Baro-VNAV NA when using Ardmore Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Ardmore Muni altimeter setting and increase all DA 96 feet, all MDA 100 feet; increase LPV Cats A, B, C visibility ½ mile, increase LNAV/VNAV Cats A, B, C and LNAV and Circling Cat C visibility ¼ mile. VDP NA with Ardmore Muni altimeter setting.

MISSED APPROACH:
Climb to 2500 direct JETBI and hold.

AWOS-3
124.175

FORT WORTH CENTER
124.75 323.0

UNICOM
122.8 (CTAF) 0


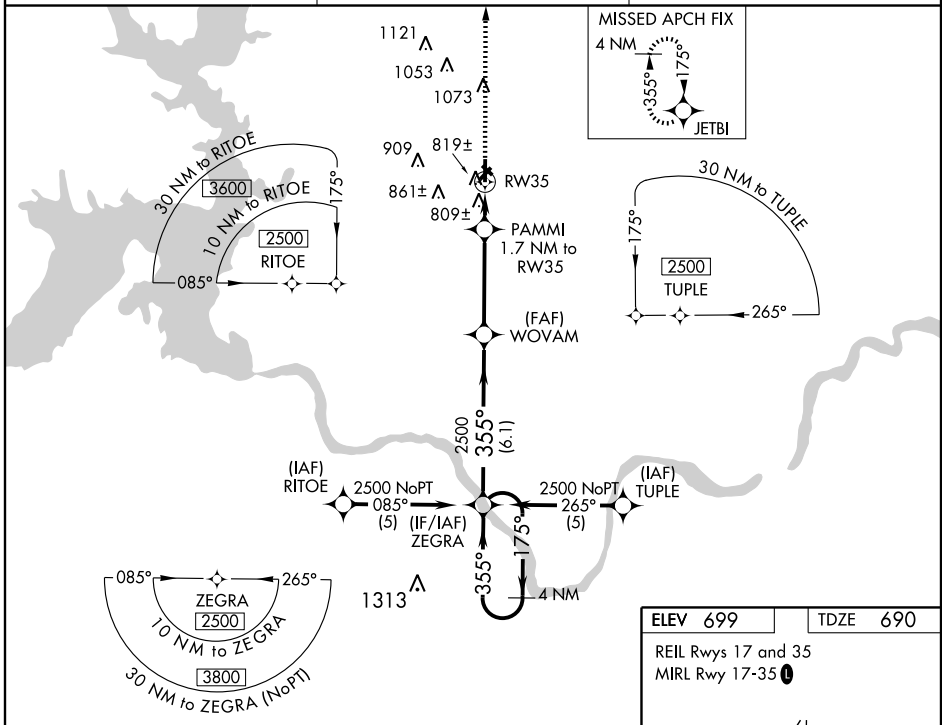


SC-1, 31 MAY 2012 to 28 JUN 2012

SC-1, 31 MAY 2012 to 28 JUN 2012

ELEV 699	TDZE 690
----------	----------

REIL Rwy 17 and 35
MIRL Rwy 17-35 0

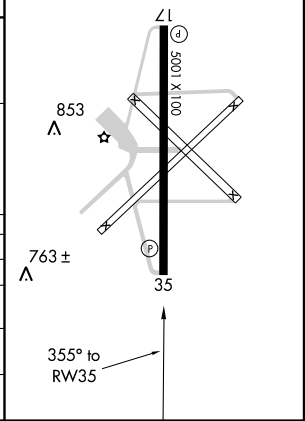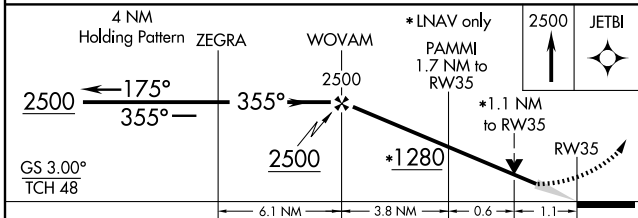

CATEGORY	A	B	C	D
LPV DA	940-¾	250 (300-¾)		NA
LNAV/VNAV DA	1111-1½	421 (500-1½)		NA
LNAV MDA	1100-1 410 (500-1)		1100-1¼ 410 (500-1¼)	NA
CIRCLING	1220-1 521 (600-1)		1220-1½ 521 (600-1½)	NA