WAAS	APP CRS	Rwy Idg	8501
CH 87112	355°	TDZE	790
W35A		Apt Elev	794

RNAV (GPS) RWY 35

GERALD R FORD INTL (GRR)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Holland altimeter setting and increase all DA 76 feet and all MDA 80 feet. Increase LNAV/VNAV visibility to RVR 6000 all Cats and LNAV Cat C visibility to RVR 4000. For inoperative MALSR, increase LNAV Cat D visibility to RVR 6000. For inoperative MALSR when using Holland altimeter setting increase LPV all Cats visibility to RVR 5000. Baro-VNAV and VDP NA when using Holland altimeter setting.

ASR

MALSR

MISSED APPROACH: Climb to 3000 direct HABKO and via track 350° to CLOCK and hold.

ATIS	GRAND RAPIDS APP CON★	GRAND RAPIDS TOWER★	GND CON	CLNC DEL	UNICOM
118.725	128.4 257.6	135.65 (CTAF) L 339.8	121.8	119.3	122.95

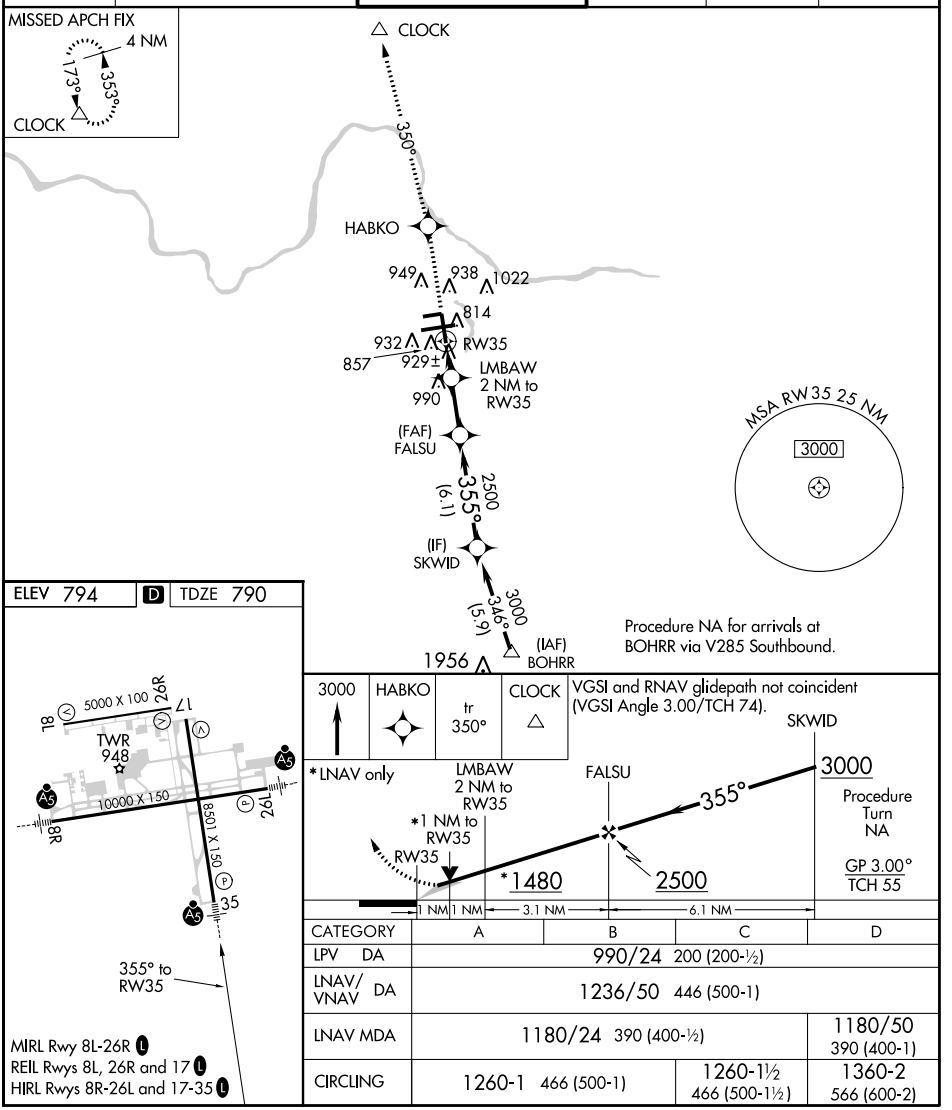

CATEGORY	A	B	C	D
LPV DA	990/24 200 (200-½)			
LNAV/VNAV DA	1236/50 446 (500-1)			
LNAV MDA	1180/24 390 (400-½)			1180/50 390 (400-1)
CIRCLING	1260-1 466 (500-1)		1260-1½ 466 (500-1½)	1360-2 566 (600-2)

EC-1, 22 JUN 2017 to 20 JUL 2017
EC-1, 22 JUN 2017 to 20 JUL 2017