APP CRS	Rwy ldg	7003
306°	TDZE	591
	Apt Elev	591

RNAV (RNP) Z RWY 30
GARY/CHICAGO INTL (GYY)

For uncompensated Baro-VNAV systems, procedure NA below -4°C (25°F) or above 47°C (117°F). RF and GPS REQUIRED. For inoperative MALSR, increase RNP 0.13 visibility to 1¼ all Cats.

NA

MALSR

MISSED APPROACH: Climb to 2100 on track 306°to HOSEN, right turn to DANGE, track 028° to KEGLE and hold.

ATIS	CHICAGO APP CON	GARY TOWER ★	GND CON
134.575	133.1 285.6	125.6 (CTAF) L	121.9

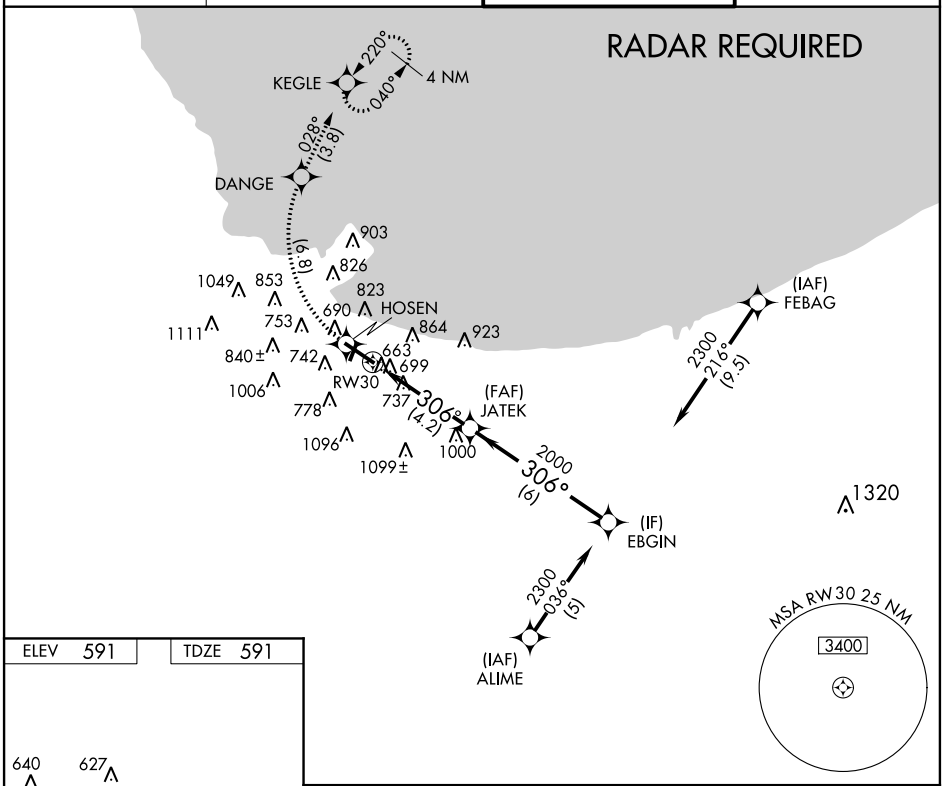

EC-2, 02 MAY 2013 to 30 MAY 2013

EC-2, 02 MAY 2013 to 30 MAY 2013

ELEV 591 TDZE 591



REIL Rwys 2, 12 and 20 L
HIRL Rwy 12-30 L
MIRL Rwy 2-20 L

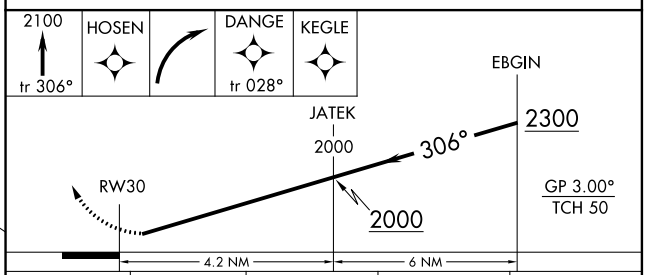

CATEGORY	A	B	C	D
RNP 0.13 DA	936-¾ 345 (400-¾)			

AUTHORIZATION REQUIRED