

SE-4, 31 MAY 2012 to 28 JUN 2012



AUGUSTA DEP CON ★  
126.8 270.3  
CTAF  
122.8

TAKEOFF MINIMUMS:

Rwy 10: STANDARD.

Rwy 28: 200-1¼ or STANDARD with a minimum climb of 240 feet per NM to 700, or alternatively, with standard takeoff minimums and a normal 200 feet/NM climb gradient, takeoff must occur no later than 1800 feet prior to departure end.

NOTE: RNAV 1.  
NOTE: RADAR Required.  
NOTE: DME/DME/IRU or GPS Required.  
NOTE: Do not exceed 230 KIAS until advised by ATC.

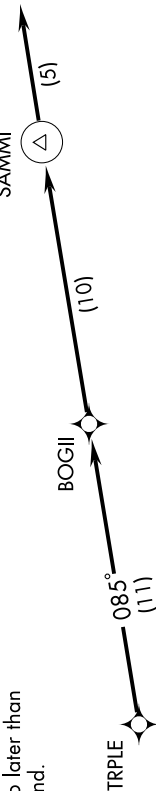

NOTE: Chart not to scale.

▼ DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 10,28: Climb heading assigned by ATC, expect vectors to TRPLE, then via depicted route to SAMMI, then fly heading 085°, expect radar vectors. Thence....

.... maintain altitude assigned by ATC. Expect clearance to filed altitude/flight level within 10 minutes after departure.

TAKEOFF OBSTACLE NOTES:

Rwy 10: Numerous trees beginning abeam DER, 31' left of centerline, up to 100' AGL/599' MSL. Building 934' from DER, 19' left of centerline, 50' AGL/549' MSL. Numerous trees beginning 377' from DER, 94' right of centerline, up to 100' AGL/599' MSL.

Rwy 28: Tree 5,715' from DER, 553' left of centerline, 100' AGL/619' MSL. Numerous trees beginning 32' from DER, 216' right of centerline, up to 100' AGL/579' MSL. Numerous trees beginning 8' from DER, 53' left of centerline, up to 100' AGL/629' MSL.

SE-4, 31 MAY 2012 to 28 JUN 2012