

| | | |
|--|------------------------|--|
| LOC/DME I-QOV 111.15 Chan 48(Y) | APP CRS 049° | Rwy ldg 10000 TDZE 791 Apt Elev 797 |
|--|------------------------|--|

ILS or LOC RWY 5R


INDIANAPOLIS INTL (IND)

Simultaneous approach authorized with Rwy 5L.
 For inoperative ALSF increase GOLSE Fix Minimums
 S-LOC 5R Cat D visibility to RVR 5000. ADF REQUIRED.

ALSF-2


MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct COLFA LOM and hold, continue climb-in-hold to 3000.

| | | | | |
|-----------------------|--|----------------------------------|-------------------------------|---------------------------------|
| ATIS 134.25 | INDIANAPOLIS APP CON 119.3 317.8 | INDY TOWER 120.9 257.8 | GND CON 121.9 257.8 | CLNC DEL 128.75 257.8 |
|-----------------------|--|----------------------------------|-------------------------------|---------------------------------|

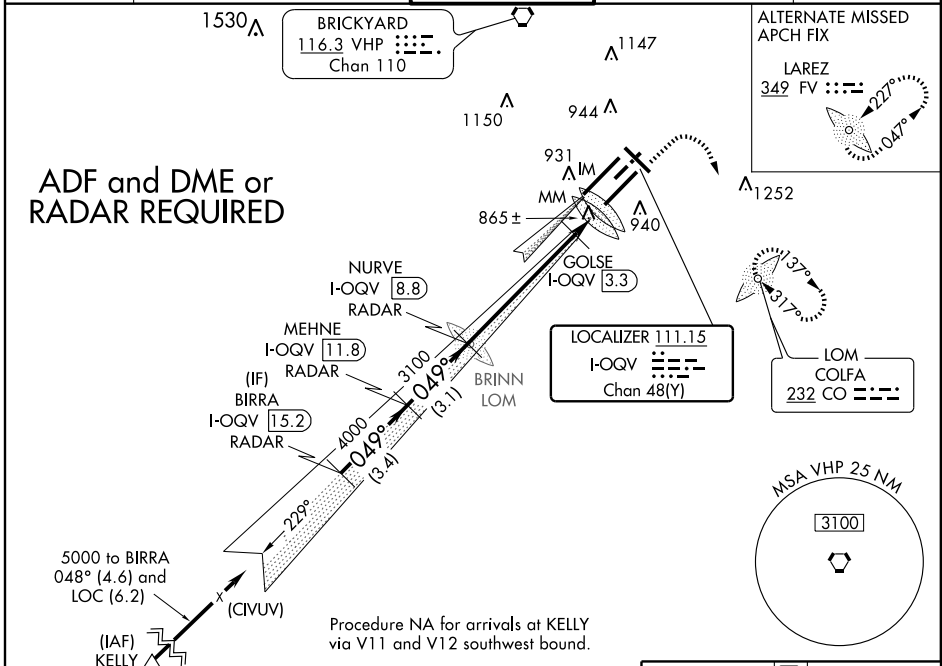

EC-2, 31 MAY 2012 to 28 JUN 2012

EC-2, 31 MAY 2012 to 28 JUN 2012

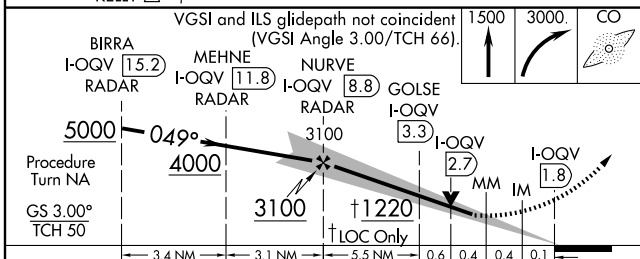

| | | | | |
|--------------------|---------------------|----------------------|---------------------|---------------------|
| CATEGORY | A | B | C | D |
| S-ILS 5R | 991/18 200 (200-½) | | | |
| S-LOC 5R | 1220/24 429 (500-½) | 1220/40 429 (500-¾) | | 1220/50 429 (500-1) |
| CIRCLING | 1420-1 623 (700-1) | 1420-1¾ 623 (700-1¾) | | 1420-2 623 (700-2) |
| GOLSE FIX MINIMUMS | | | | |
| S-LOC 5R | 1120/24 329 (400-½) | | 1120/40 329 (400-¾) | |
| CIRCLING | 1420-1 623 (700-1) | 1420-1¾ 623 (700-1¾) | | 1420-2 623 (700-2) |

