

LOC I-AOH <b>109.3</b>	APP CRS <b>276°</b>	Rwy Idg TDZE Apt Elev	<b>6000</b> <b>975</b> <b>975</b>
---------------------------	------------------------	-----------------------------	---


# ILS or LOC RWY 28

LIMA ALLEN COUNTY (A0H)



**NA** When local altimeter setting not received, use Findlay altimeter setting and increase call DA/MDA 80 feet. Increase ILS all Cats visibility 1/8 mile, S-LOC Cat C/D and Circling Cat C visibility 1/4 mile.

**MISSED APPROACH:** Climb to 3000 on heading 276° and right turn on ROD VORTAC R-360 to LINZZ INT/ROD 31.2 DME and hold.

ASOS <b>108.4</b>	INDIANAPOLIS CENTER <b>128.075 269.0</b>	UNICOM <b>122.7 (CTAF)</b>
----------------------	---	-------------------------------

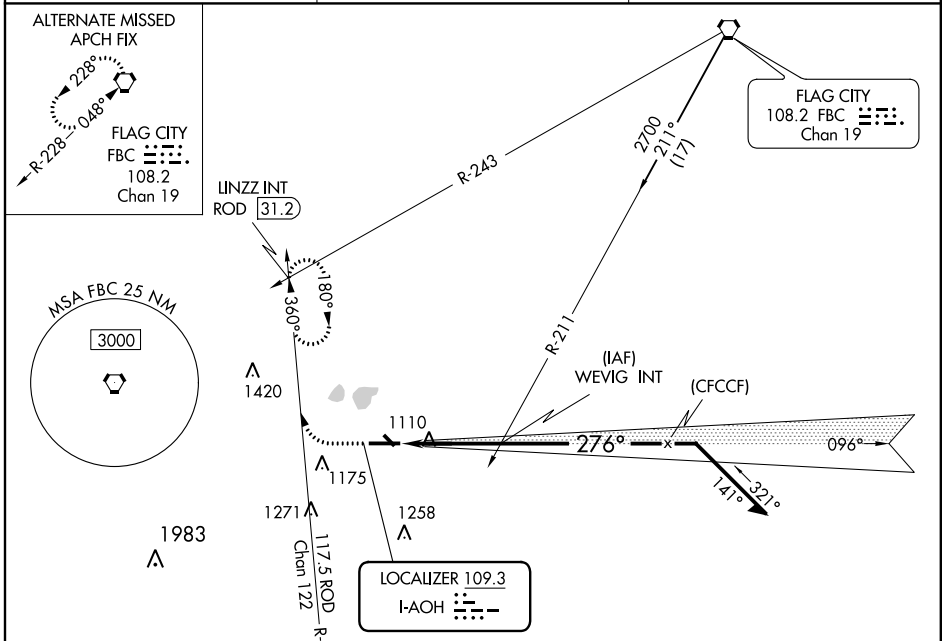

ELEV 975	TDZE 975
----------	----------

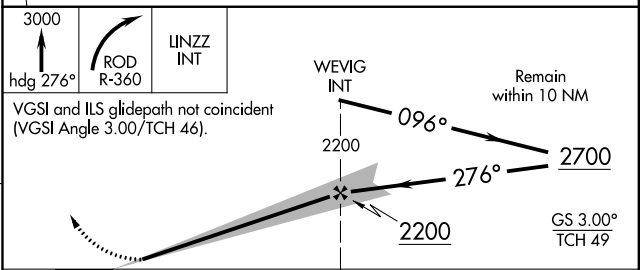

	A	B	C	D
S-ILS 28	1175-3/4		200 (200-3/4)	
S-LOC 28	1500-1	525 (600-1)	1500-1 1/2	525 (600-1 1/2)
CIRCLING	1500-1	525 (600-1)	1500-1 1/2	1540-2 565 (600-2)

EC-2, 08 JAN 2015 to 05 FEB 2015

EC-2, 08 JAN 2015 to 05 FEB 2015

# RNAV (GPS) RWY 10


LIMA ALLEN COUNTY (AOH)

WAAS Ch <b>65816</b> <b>W10A</b>	APP CRS <b>096°</b>	Rwy Idg THRE Apt Elev	<b>6000</b> <b>949</b> <b>975</b>
--	------------------------	-----------------------------	---

**⚠** Baro-VNAV NA when using Findlay altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 38°C (100°F). When local altimeter setting not received, use Findlay altimeter setting and increase all DA/MDA 80 feet, increase LPV all Cats visibility 1/8 mile, LNAV/VNAV all Cats visibility 1/4 mile. Increase LNAV Cats C and D visibility 1/8 mile. When VGSi inop, Straight-in/Circling Rwy 10 procedure NA at night. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.



**MISSED APPROACH:**  
Climb to 3000 direct  
DIYZO and hold.

ASOS <b>108.4</b>	INDIANAPOLIS CENTER <b>128.075 269.0</b>	UNICOM <b>122.7 (CTAF) 0</b>
----------------------	---	---------------------------------

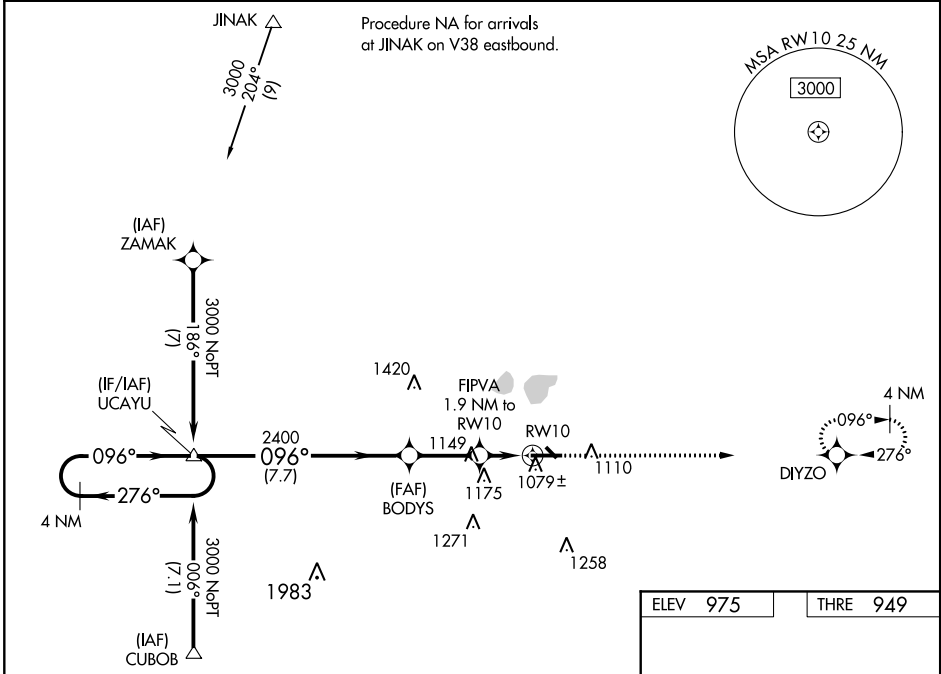

EC-2, 08 JAN 2015 to 05 FEB 2015

EC-2, 08 JAN 2015 to 05 FEB 2015

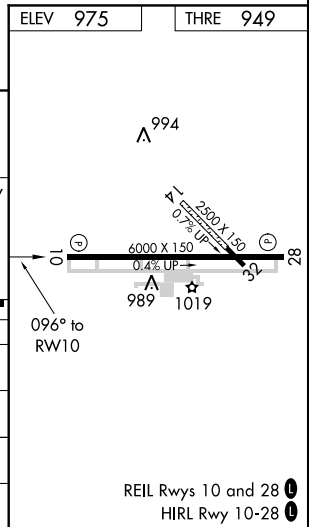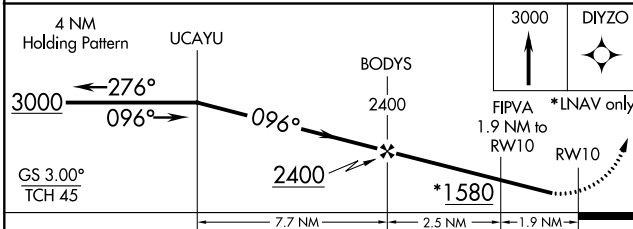

CATEGORY	A	B	C	D
LPV DA		1199-1	250 (300-1)	
LNAV/DA VNAV		1260-1	311 (300-1)	
LNAV MDA	1400-1	451 (500-1)	1400-1 3/8	451 (500-1 3/8)
CIRCLING	1420-1 445 (500-1)	1440-1 465 (500-1)	1440-1 1/2 465 (500-1 1/2)	1540-2 565 (600-2)

# RNAV (GPS) RWY 10

WAAS CH <b>50511</b> <b>W28A</b>	APP CRS <b>276°</b>	Rwy Idg TDZE Apt Elev	<b>6000</b> <b>975</b> <b>975</b>
--	------------------------	-----------------------------	---


# RNAV (GPS) RWY 28

LIMA ALLEN COUNTY (A0H)



**⚠** Baro-VNAV NA when using Findlay altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 37°C (98°F). When local altimeter setting not received, use Findlay altimeter setting and increase all DA and MDA 80 feet. Increase LPV all Cats visibility 1/8 mile, LNAV/VNAV all Cats and LNAV Cats C/D visibility 1/4 mile. DME/DME RNP-0.3 NA. VDP NA with Findlay altimeter setting.

**MISSED APPROACH:**  
Climb to 3000 direct UCAYU and hold.

ASOS <b>108.4</b>	INDIANAPOLIS CENTER <b>128.075 269.0</b>	UNICOM <b>122.7 (CTAF) 0</b>
----------------------	---	---------------------------------

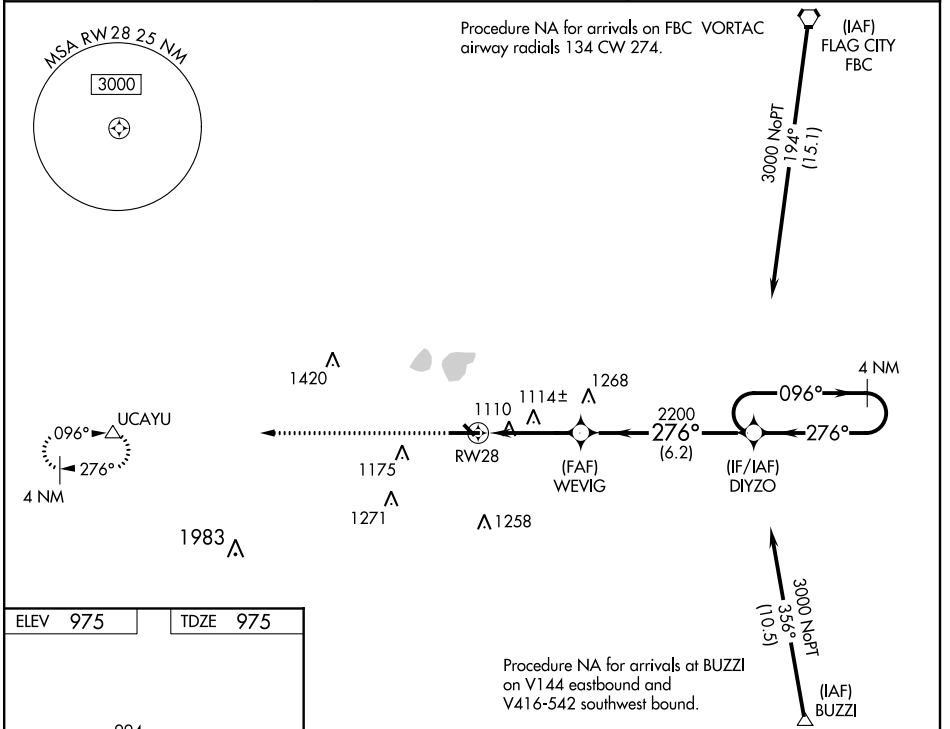

ELEV 975	TDZE 975
----------	----------

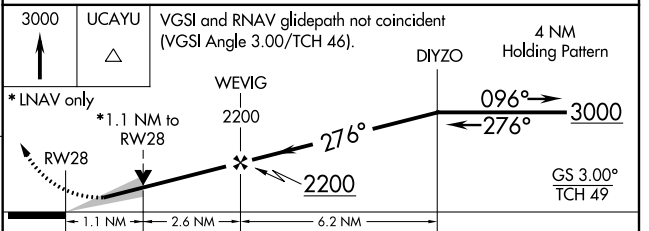

CATEGORY	A	B	C	D
LPV DA		1175-3/4	200 (200-3/4)	
LNAV/VNAV DA		1391-1 3/8	416 (500-1 3/8)	
LNAV MDA	1380-1	405 (500-1)	1380-1 1/8	405 (500-1 1/8)
CIRCLING	1420-1 445 (500-1)	1440-1 465 (500-1)	1440-1 1/2 465 (500-1 1/2)	1540-2 565 (600-2)

EC-2, 08 JAN 2015 to 05 FEB 2015

EC-2, 08 JAN 2015 to 05 FEB 2015