# RNAV (GPS) RWY 3

## PHOENIX GOODYEAR (GYR)

| WAAS CH 42839 W03A | APP CRS 030° | Rwy Idg 8500 / TDZE 954 / Apt Elev 969 |
|---|---|---|

DME/DME RNP-0.3 NA. Procedure NA at night. Helicopter visibility reduction below ¾ SM NA. VDP NA when using Phoenix Sky Harbor Intl altimeter setting. When local altimeter setting not received, use Phoenix Sky Harbor Intl altimeter setting: increase all MDA 80 feet and visibilty Cat C/D ¼ SM.

MISSED APPROACH: Climb to 1900 then climbing left turn to 4000 direct TATUY and hold.

| ATIS | LUKE APP CON ★ | GOODYEAR TOWER ★ | GND CON | UNICOM |
|---|---|---|---|---|
| 118.35 | 125.45 263.125 | 120.1 (CTAF) 239.3 | 121.7 | 122.95 |

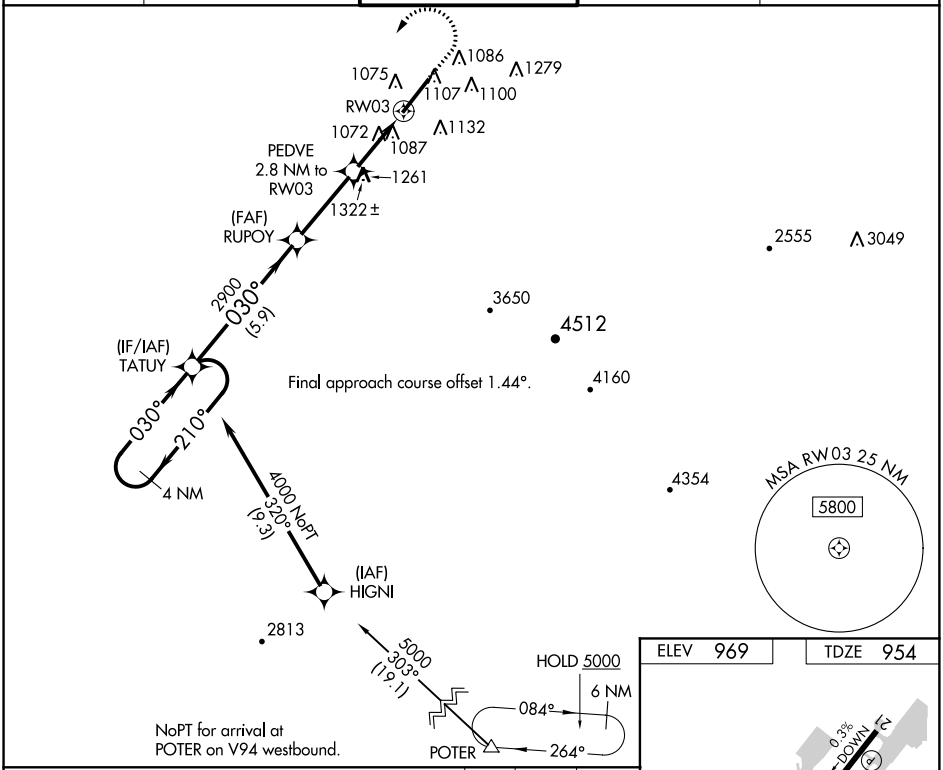


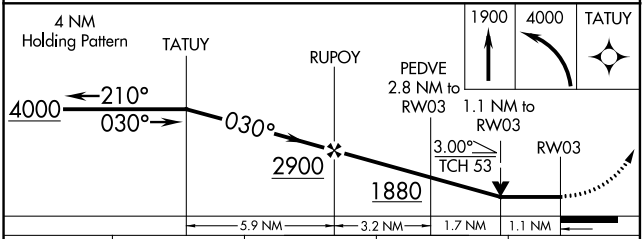


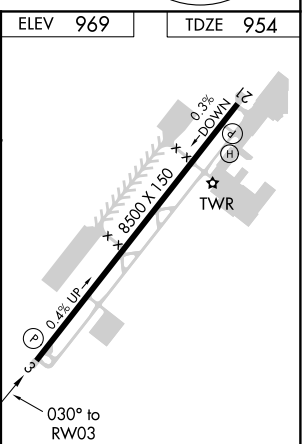


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LP MDA | 1340-1 386 (400-1) | | 1340-1⅛ 386 (400-1⅛) | |
| LNAV MDA | 1580-1 626 (700-1) | | 1580-1¾ 626 (700-1¾) | |
| C CIRCLING | 1580-1 611 (700-1) | | 1800-2½ 831 (900-2½) | 1920-3 951 (1000-3) |

REIL Rwys 3 and 21
MIRL Rwy 3-21




SW-4, 12 OCT 2017 to 09 NOV 2017