

RNAV (GPS) RWY 36

MIDLOTHIAN/WAXAHACHIE/MID-WAY RGNL (JWY)

WAAS CH 62814 W36A	APP CRS 358°	Rwy Idg TDZE Apt Elev	6500 703 726
--	------------------------	-----------------------------	---




⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (117°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Dallas Love Field altimeter setting and increase all DA 88 feet and all MDA 100 feet, increase LPV all Cats visibility ¼ mile, LNAV/VNAV all Cats visibility ½ mile, LNAV Cats C and D visibility ¼ mile, Circling Cat D visibility ¼ mile. Baro-VNAV and VDP NA when using Dallas Love Field altimeter setting.

MISSED APPROACH: Climb to 3000 direct IMENE and right turn via track 045° to CHMPZ and hold, continue climb-in-hold to 3000.

AWOS-3
119.575

REGIONAL APP CON
125.2 343.65

UNICOM
122.975 (CTAF)

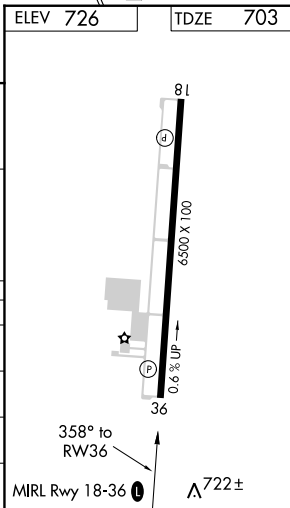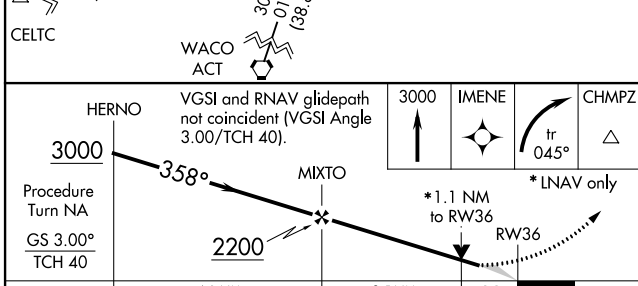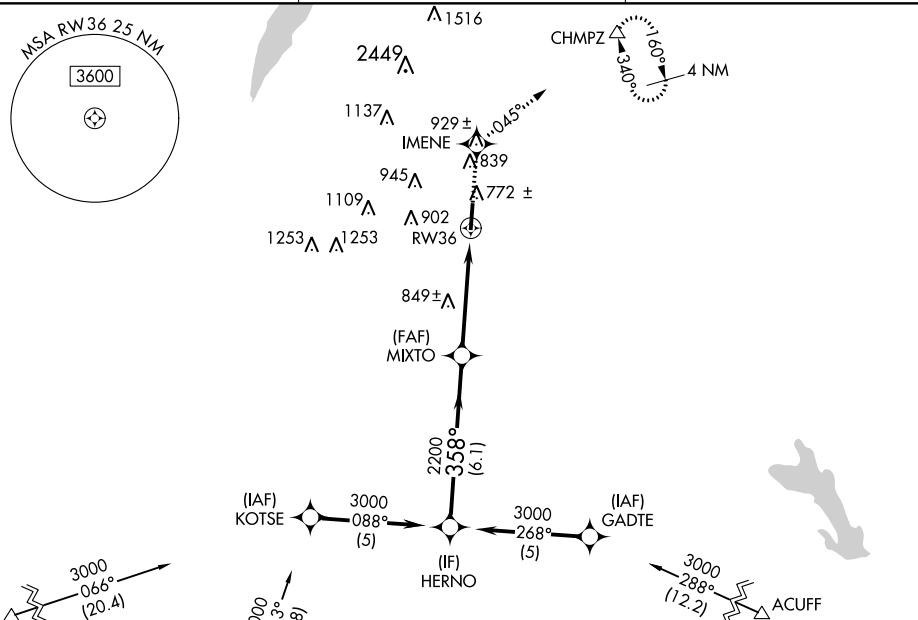

CATEGORY	A	B	C	D
LPV DA		953-1	250 (300-1)	
LNAV/DA		992-1	289 (300-1)	
LNAV MDA		1100-1	397 (400-1)	1100-1¼ 397 (400-1¼)
CIRCLING	1140-1 414 (500-1)	1180-1 454 (500-1)	1180-1½ 454 (500-1½)	1300-2 574 (600-1)

RNAV (GPS) RWY 36

SC-2, 08 JAN 2015 to 05 FEB 2015

SC-2, 08 JAN 2015 to 05 FEB 2015

WAAS CH 62920 W18A	APP CRS 178°	Rwy Idg THRE 726 Apt Elev 726	6500
--	------------------------	---	-------------

RNAV (GPS) RWY 18


MIDLOTHIAN/WAXAHACHIE/MID-WAY RGNL (JWY)

⚠ Baro-VNAV NA when using Dallas Love Field altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 39°C (102°F).
⚠ DME/DME RNP-0.3 NA. VDP NA with Dallas Love Field altimeter setting. When local altimeter setting not received, use Dallas Love Field altimeter setting and increase all DA 88 feet and all MDA 100 feet, increase LPV and LNAV/VNAV visibility ¼ mile all Cats, LNAV Cats C and D ⅜ mile, and Circling Cat D visibility ¼ mile.

MISSED APPROACH: Climb to 1300 then climbing left turn to 3000 direct CABBY and hold.

AWOS-3 119.575	REGIONAL APP CON 125.2 343.65	UNICOM 122.975 (CTAF) 0
--------------------------	---	-----------------------------------

RADAR REQUIRED

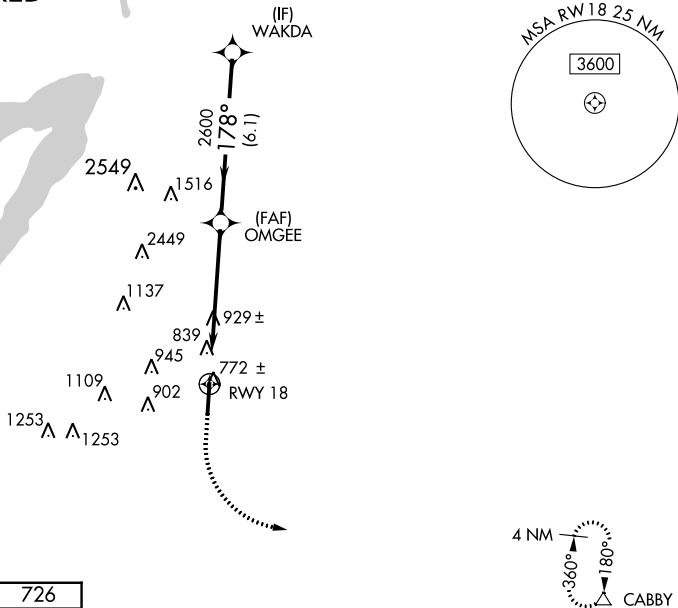

SC-2, 08 JAN 2015 to 05 FEB 2015

SC-2, 08 JAN 2015 to 05 FEB 2015

ELEV 726	THRE 726				
1300	3000	CABBY			
*LNAV only				WAKDA	
		OMGEE	2600	3000	
		GS 3.00°		TCH 40	
		1.4 NM	4.4 NM	6.1 NM	
CATEGORY	A	B	C	D	
LPV DA		926-¾	200 (200-¾)		
LNAV/VNAV DA		976-⅞	250 (300-⅞)		
LNAV MDA	1220-1	494 (500-1)	1220-1⅓	494 (500-1⅓)	
CIRCLING	1220-1	494 (500-1)	1220-1½	1300-2	
			494 (500-1½)	574 (600-1)	

RNAV (GPS) RWY 18