

NDB JYR 257	APP CRS 153°	Rwy Idg TDZE Apt Elev	5898 1665 1670
-----------------------	------------------------	-----------------------------	---

NDB RWY 17




YORK MUNI (JYR)

▽ When local altimeter setting not received, use Aurora altimeter setting and increase all MDA 60 feet, increase Straight-in and Circling visibilities Cat C ¼ mile. Visibility reduction by helicopters NA.

▲ NA

MISSED APPROACH: Climb to 3000 then climbing right turn to 3300 direct JYR NDB and hold.

AWOS-3 124.175	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

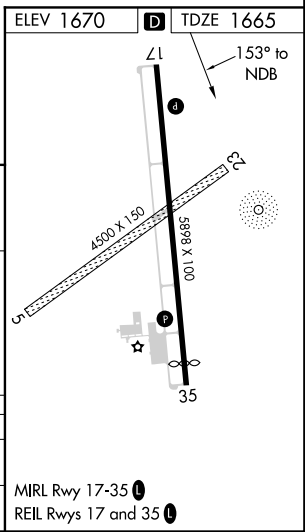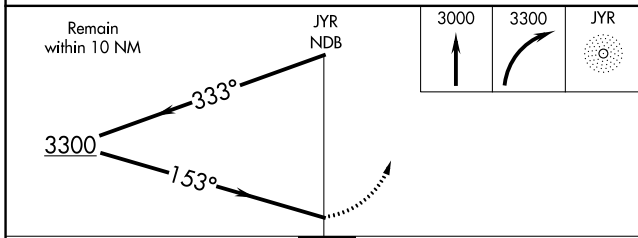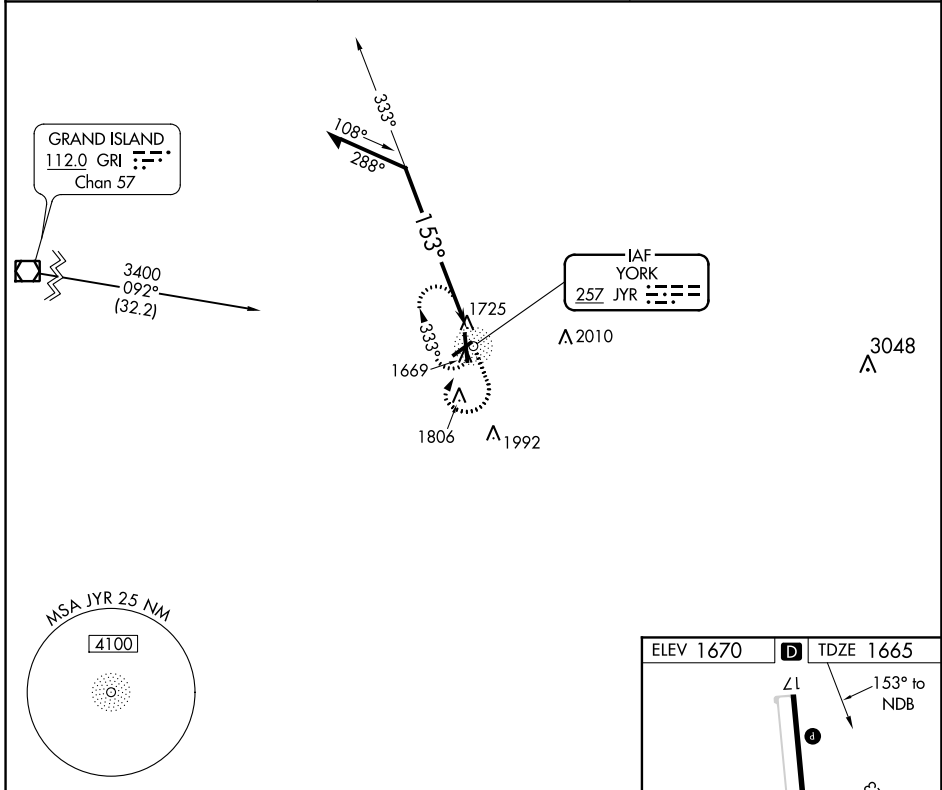

CATEGORY	A	B	C	D
S-17	2300-1	635 (700-1)	2300-1¾ 635 (700-1¾)	NA
CIRCLING	2300-1	630 (700-1)	2300-1¾ 630 (700-1¾)	NA

NC-2, 07 DEC 2017 to 04 JAN 2018

NC-2, 07 DEC 2017 to 04 JAN 2018

NDB JYR 257	APP CRS 002°	Rwy Idg TDZE Apt Elev	5498 1670 1670
-----------------------	------------------------	-----------------------------	---




NDB RWY 35

YORK MUNI (JYR)

⚠ NA When local altimeter setting not received, use Aurora altimeter setting and increase all MDA 60 feet.

MISSED APPROACH: Climb to 3000 then climbing left turn to 3300 direct JYR NDB and hold.

AWOS-3 124.175	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 122.8 (CTAF)
--------------------------	--	-------------------------------

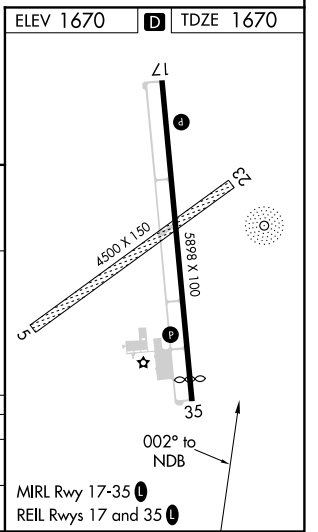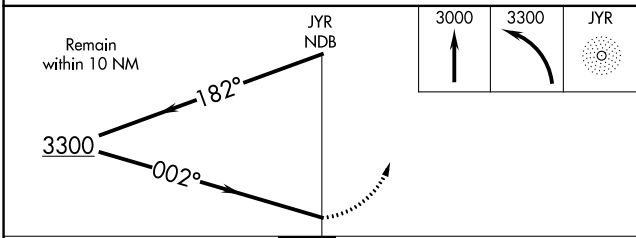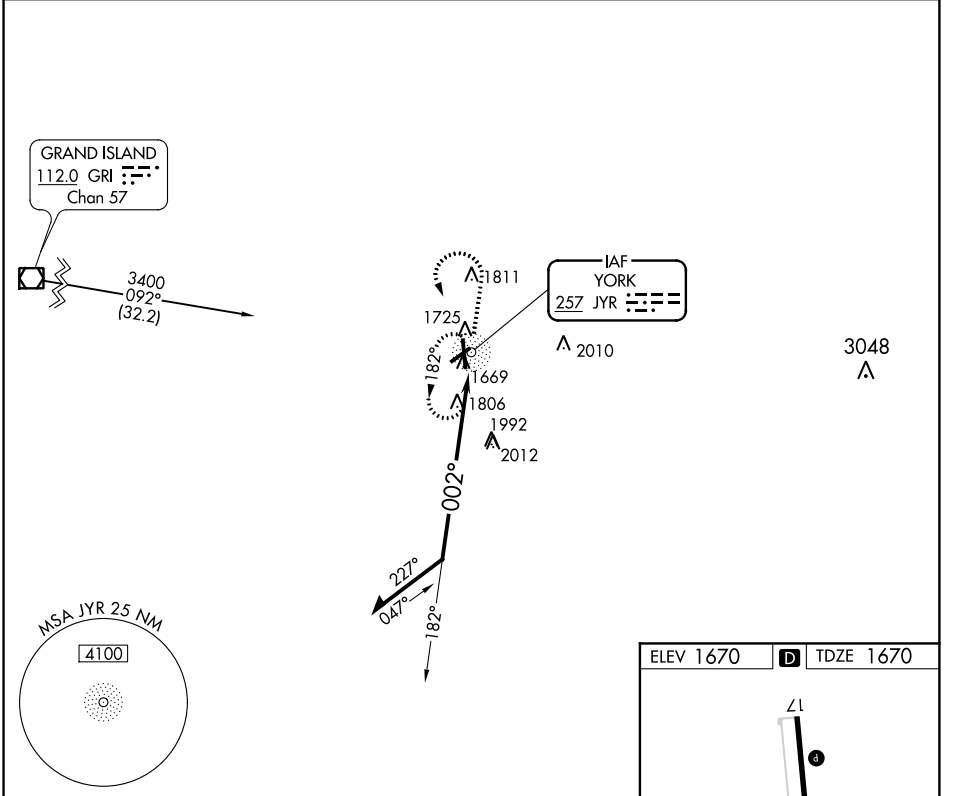

CATEGORY	A	B	C	D
S-35	2420-1 750 (800-1)	2420-1¼ 750 (800-1¼)	2420-2¼ 750 (800-2¼)	NA
CIRCLING	2420-1 750 (800-1)	2420-1¼ 750 (800-1¼)	2420-2¼ 750 (800-2¼)	NA

NC-2, 07 DEC 2017 to 04 JAN 2018

NC-2, 07 DEC 2017 to 04 JAN 2018

WAAS CH 86301 W17A	APP CRS 169°	Rwy Idg 5898 TDZE 1665 Apt Elev 1670
--	------------------------	---





RNAV (GPS) RWY 17

YORK MUNI (JYR)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Aurora altimeter setting and increase all DA/MDA 60 feet and all LPV and LNAV/VNAV visibility ¼ mile. VDP and Baro-VNAV NA when using Aurora altimeter setting.

MISSED APPROACH:
Climb to 4000 direct WIVFO and hold.

AWOS-3 124.175	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

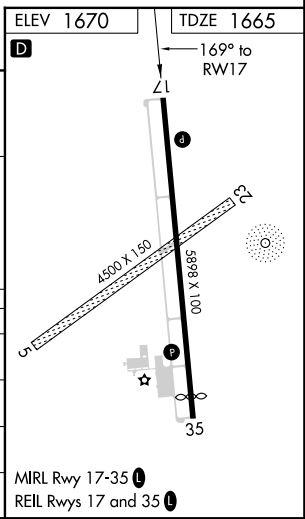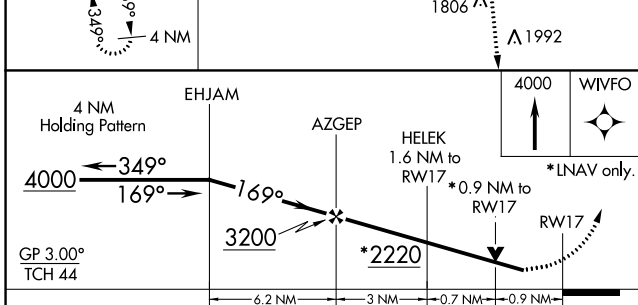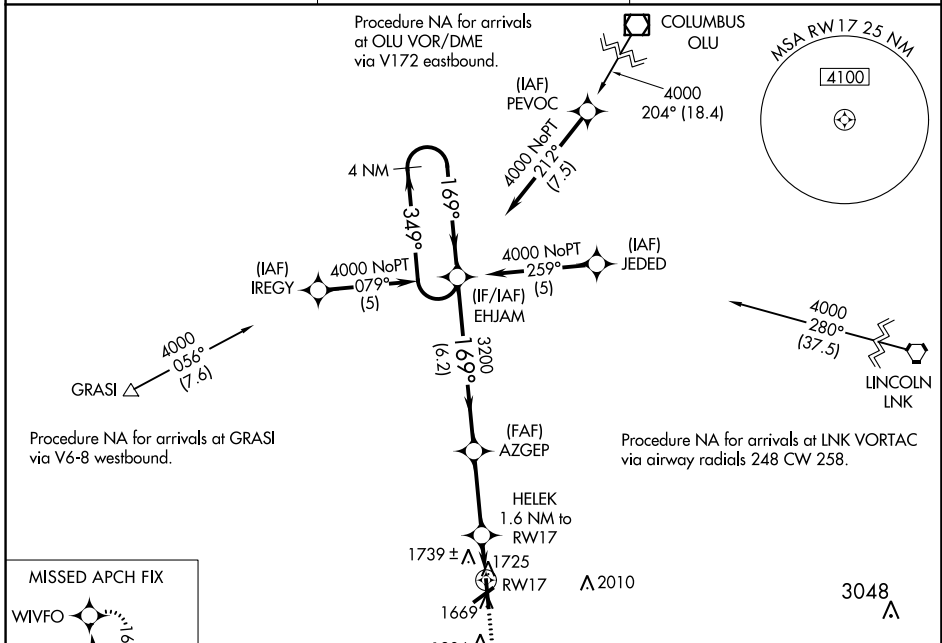

CATEGORY	A	B	C	D
LPV DA	1915-¾	250 (300-¾)		NA
LNAV/VNAV DA	2031-1¼	366 (400-1¼)		NA
LNAV MDA	2000-1	335 (400-1)		NA
CIRCLING	2060-1 390 (400-1)	2120-1 450 (500-1)	2120-1½ 450 (500-1½)	NA

NC-2, 07 DEC 2017 to 04 JAN 2018

NC-2, 07 DEC 2017 to 04 JAN 2018

WAAS CH 49113 W35A	APP CRS 349°	Rwy ldg 5498 TDZE 1670 Apt Elev 1670
--	------------------------	---


RNAV (GPS) RWY 35

YORK MUNI (JYR)



⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Aurora altimeter setting and increase all DA/MDA 60 feet and all LPV, all LNAV/VNAV, and Cat C LNAV visibility ¼ mile. VDP and Baro-VNAV NA when using Aurora altimeter setting.

MISSED APPROACH: Climb to 4000 direct EHJAM and hold.

AWOS-3 124.175	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

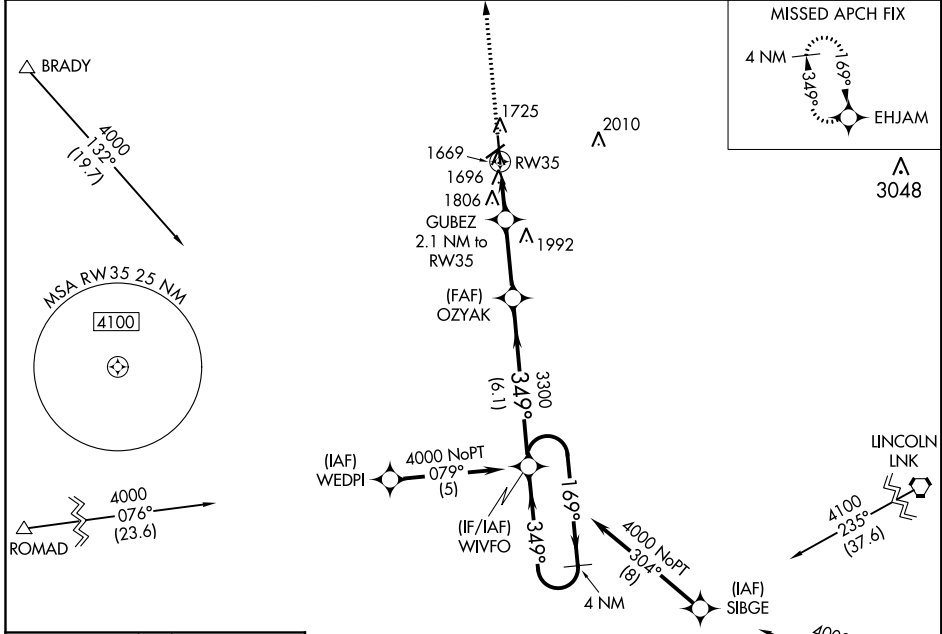

ELEV 1670	D	TDZE 1670
-----------	----------	-----------

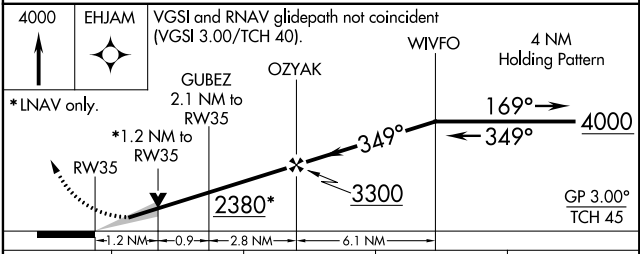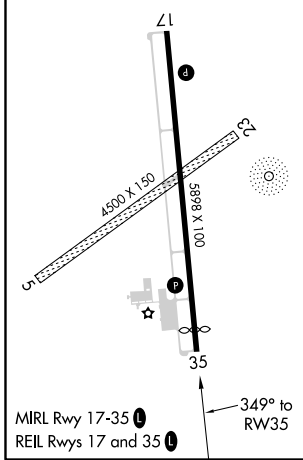

CATEGORY	A	B	C	D
LPV DA	1920-¾	250 (300-¾)		NA
LNAV/VNAV DA	2004-1¼	334 (400-1¼)		NA
LNAV MDA	2060-1	390 (400-1)		NA
CIRCLING	2060-1 390 (400-1)	2120-1 450 (500-1)	2120-1½ 450 (500-1½)	NA

NC-2, 07 DEC 2017 to 04 JAN 2018

NC-2, 07 DEC 2017 to 04 JAN 2018