

LOC/DME I-RMN	APP CRS	Rwy Idg	5000
108.75	329°	TDZE	196
Chan 24 (Y)		Apt Elev	212

ILS or LOC RWY 33



STAFFORD RGNL (RMN)

▽ If local altimeter setting not received, use Shannon, Fredericksburg, VA altimeter setting and increase all DH/MDAs 40 feet.
▲NA Inoperative table does not apply to S-ILS 33 and to S-LOC Cats B and C. DME or ADF required.





MISSED APPROACH: Climb to 600 then climbing left turn to 2000 direct BRV VORTAC and hold.

AWOS-3	POTOMAC APP CON	GCO	UNICOM
126.325	128.525 306.925	135.075	122.725 (CTAF) 0

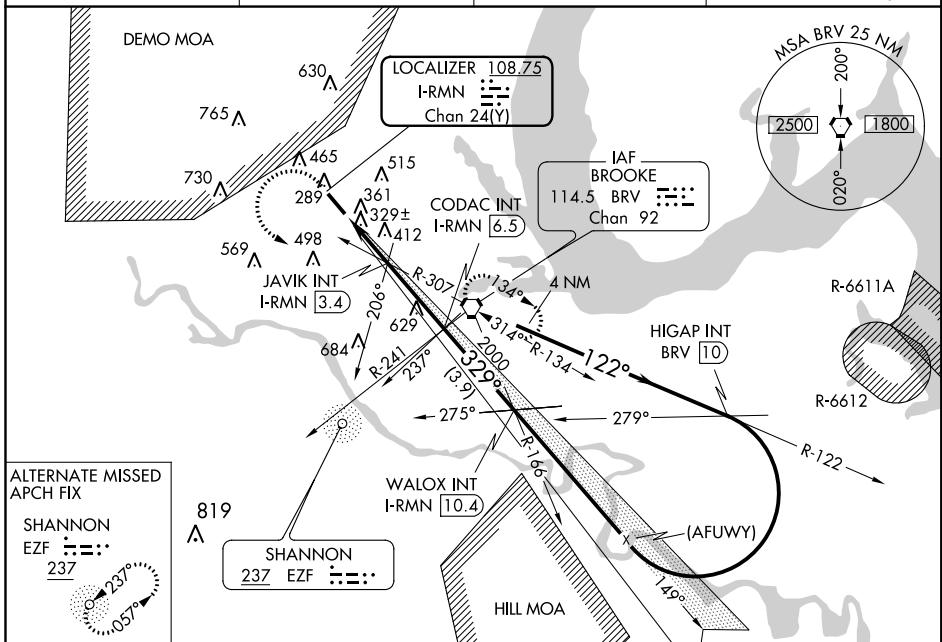

ELEV 212	TDZE 196
----------	----------

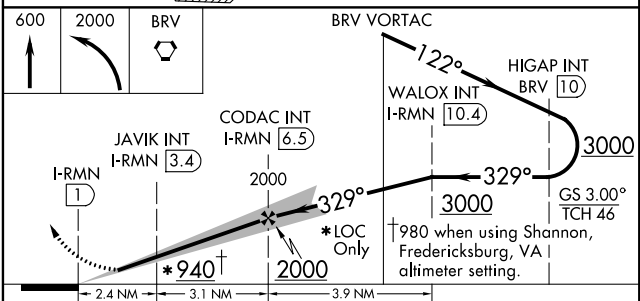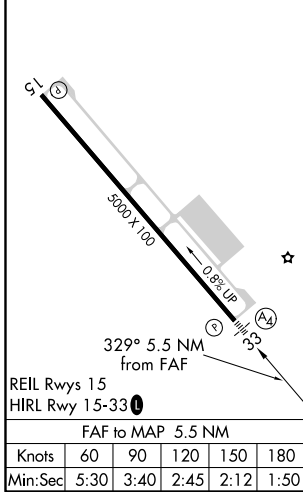

CATEGORY	A	B	C	D
S-ILS 33		396- $\frac{3}{4}$	200 (200- $\frac{3}{4}$)	
S-LOC 33		580- $\frac{3}{4}$	384 (400- $\frac{3}{4}$)	580-1 $\frac{1}{4}$ 384 (400-1 $\frac{1}{4}$)
CIRCLING	720-1 508 (600-1)	740-1 528 (600-1)	840-1 $\frac{3}{4}$ 628 (700-1 $\frac{3}{4}$)	860-2 648 (700-2)

NE-3, 22 JUN 2017 to 20 JUL 2017

NE-3, 22 JUN 2017 to 20 JUL 2017

WAAS CH 81805 W33A	APP CRS 329°	Rwy Idg TDZE Apt Elev	5000 196 212
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 33

STAFFORD RGNL (RMN)


▽ If local altimeter setting not received, use Shannon, Fredericksburg, VA altimeter setting and increase all DAs/MDAs 40 feet. Baro/VNAV NA below -15°C (5°F). VDP and Baro-VNAV NA when using Shannon, Fredericksburg, VA altimeter setting. Inoperative table does not apply to LNAV Cat C. DME/DME RNP-0.3 NA.

△NA MISSED APPROACH: Climb to 4000 direct KOBEC and left turn via 209° track to TECOV and left turn via 151° track to FALCO and hold.

AWOS-3 126.325	POTOMAC APP CON 128.525 306.925	GCO 135.075	UNICOM 122.725 (CTAF) 0
--------------------------	---	-----------------------	-----------------------------------

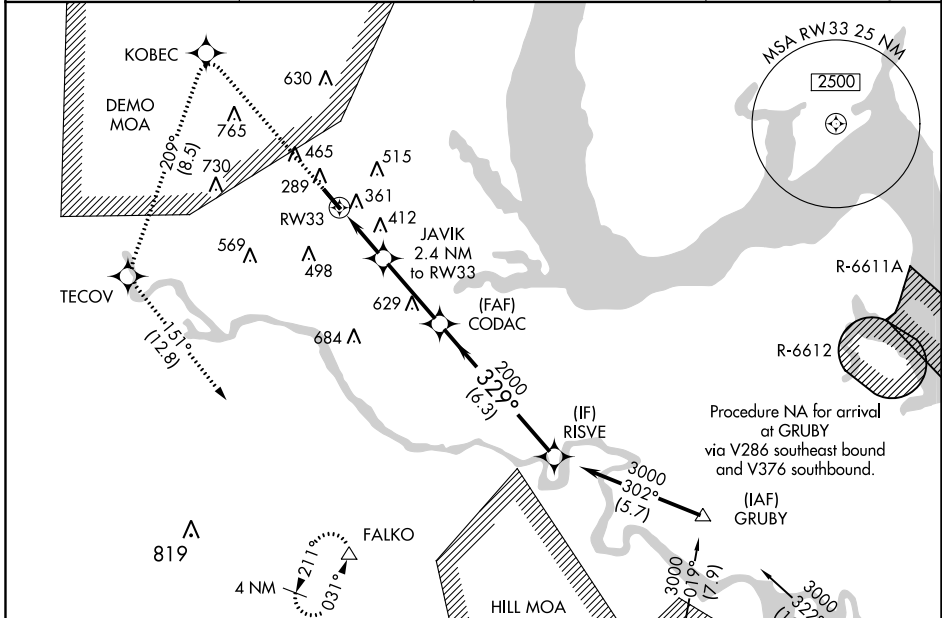

ELEV 212	TDZE 196
----------	----------

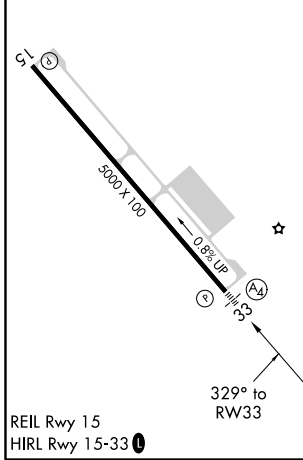

4000	KOBEC	TECOV	FALCO	RISVE
↑	209° TRK	151° TRK		
	JAVIK 2.4 NM to RW33	CODAC	3000	Procedure Turn NA
	* 1.5 NM to RW33	* 980	2000	GP 3.00° TCH 46
	1.5 NM	0.9	3.1 NM	6.3 NM
CATEGORY	A	B	C	D
LPV DA	450-¾	254 (300-¾)		450-1 254 (300-1)
LNAV/ VNAV DA	460-¾	264 (300-¾)		460-1 264 (300-1)
LNAV MDA	700-¾	504 (500-¾)	700-1½	504 (500-1½)
CIRCLING	720-1 508 (600-1)	740-1 528 (600-1)	840-1¾ 628 (700-1¾)	880-2 668 (700-2)

NE-3, 22 JUN 2017 to 20 JUL 2017

NE-3, 22 JUN 2017 to 20 JUL 2017

VORTAC BRV 114.5 Chan 92	APP CRS 314°	Rwy Idg TDZE 196 Apt Elev 212	5000
--	------------------------	---	-------------


VOR RWY 33

STAFFORD RGNL (RMN)


▼ If local altimeter setting not received, use Shannon, Fredericksburg, VA altimeter setting and increase all MDAs 40 feet. VDP NA with Shannon, Fredericksburg, VA altimeter setting. Inoperative table does not apply to Cat C.

MALS $(A_4) \equiv$ MISSED APPROACH: Climbing left turn to 2000 direct BRV VORTAC and hold.

AWOS-3 126.325	POTOMAC APP CON 128.525 306.925	GCO 135.075	UNICOM 122.725 (CTAF) 0
--------------------------	---	-----------------------	-----------------------------------

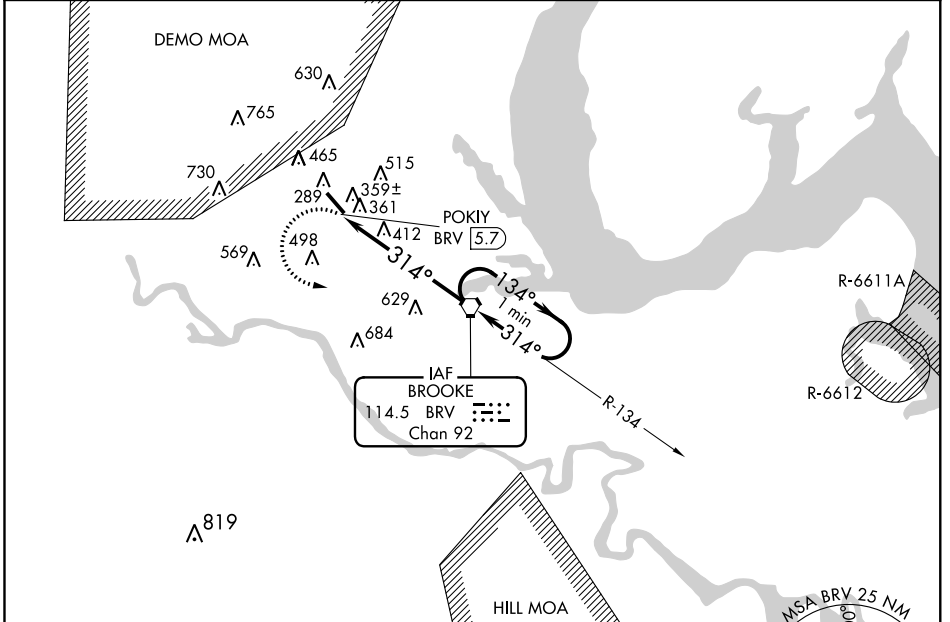


ELEV 212	TDZE 196
----------	----------

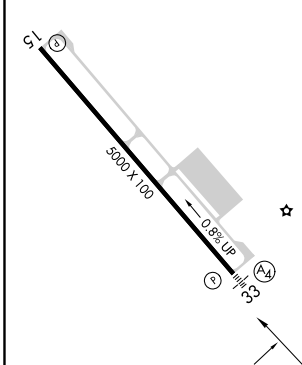

REIL Rwys 15
HIRL Rwy 15-33

FAF to MAP 5.7 NM

Knots	60	90	120	150	180
Min:Sec	5:42	3:48	2:51	2:17	1:54

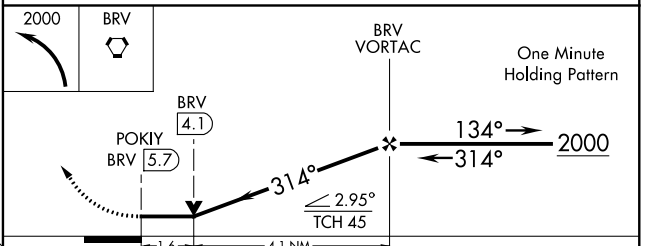

CATEGORY	A	B	C	D
S-33	740-3/4 544 (600-3/4)		740-1 1/2 544 (600-1 1/2)	740-1 3/4 544 (600-1 3/4)
CIRCLING	740-1 528 (600-1)		840-1 3/4 628 (700-1 3/4)	860-2 648 (700-2)

NE-3, 22 JUN 2017 to 20 JUL 2017

NE-3, 22 JUN 2017 to 20 JUL 2017