LOC/DME I-MYY	APP CRS	Rwy Idg	6501
108.75	169°	TDZE	10
Chan 24 (Y)		Apt Elev	36

ILS or LOC RWY 17
PHILADELPHIA INTL (PHL)

Inoperative table does not apply.
Visibility reduction by helicopter NA.

MALSF

MISSED APPROACH: Climb to 3000 via heading 155° and ARD R-207 to JEPUG INT and hold.

ATIS	PHILADELPHIA APP CON	PHILADELPHIA TOWER	GND CON	CLNC DEL
ARR 133.4	124.35 319.15	118.5 327.05 (Rwys 9L/27R, 8/26 and 17/35)	121.9 348.6	118.85 348.6
DEP 135.925		135.1 327.05 (Rwy 9R/27L)		

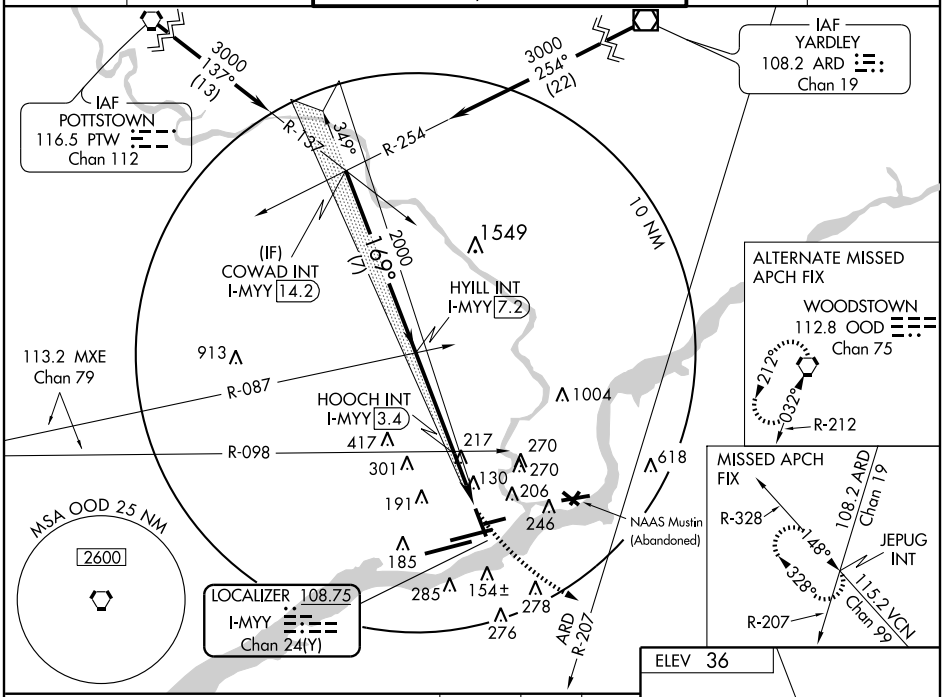

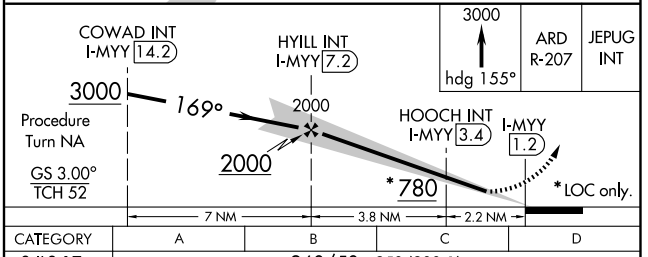



CATEGORY	A	B	C	D
S-ILS 17	260/50	250 (300-1)		
S-LOC 17	780/50 770 (800-1)	780/60 770 (800-1¼)	780-2¼ 770 (800-2¼)	780-2½ 770 (800-2½)
CIRCLING	780-1 744 (800-1)	780-1¼ 744 (800-1¼)	780-2¼ 744 (800-2¼)	780-2½ 744 (800-2½)
HOOCH FIX MINIMUMS				
S-LOC 17	480/50	470 (500-1)	480/60 470 (500-1¼)	480-1½ 470 (500-1½)
CIRCLING	540-1 504 (600-1)	640-1 604 (700-1)	640-1¾ 604 (700-1¾)	640-2 604 (700-2)

REIL Rwys 9L and 35
TDZ/CL Rwy 9R
HIRL all Rwys

FAF to MAP 6 NM					
Knots	60	90	120	150	180
Min:Sec	6:00	4:00	3:00	2:24	2:00

NE-4, 19 NOV 2009 to 17 DEC 2009