ILS RWY 26

PHILADELPHIA INTL (PHL)

LOC/DME I-LLH	APP CRS	Rwy Idg	5000
111.55	263°	TDZE	38
Chan 52 (Y)		Apt Elev	38

Inoperative table does not apply to S-ILS 26 all Cats. For inoperative MALSR, increase S-LOC 26 Cat A and B visibility to RVR 5000. Radar or DME required.

MALSR

MISSED APPROACH: Climb to 800, then climbing right turn to 3000 via heading 310° and OOD VORTAC R-353 to FROSE Int and hold.

ATIS	PHILADELPHIA APP CON	PHILADELPHIA TOWER	GND CON	CLNC DEL
ARR 133.4	124.35 319.15	118.5 327.05 (Rwys 9L/27R, 8/26 and 17/35)	121.9 348.6	118.85 348.6
DEP 135.925		135.1 327.05 (Rwy 9R/27L)		

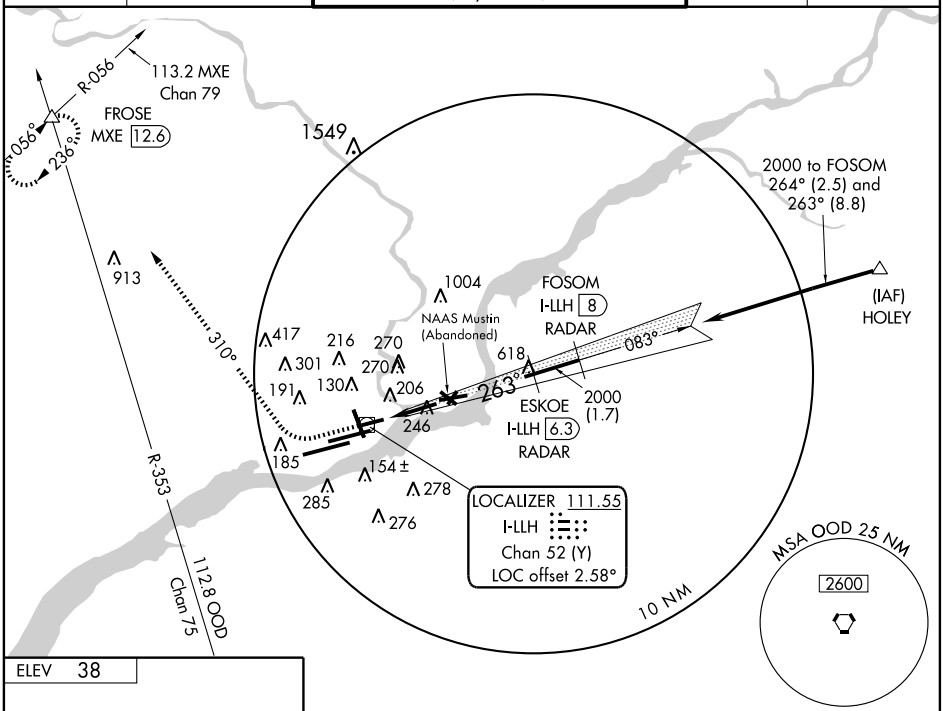

NE-4, 19 NOV 2009 to 17 DEC 2009

NE-4, 19 NOV 2009 to 17 DEC 2009

ELEV 38



REIL Rwys 9L and 35
TDZ/CL Rwy 9R
HIRL all Rwys

FAF to MAP 5.6 NM					
Knots	60	90	120	150	180
Min:Sec	5:36	3:44	2:48	2:14	1:52

800	3000 hdg 310°	OOD R-353	FROSE

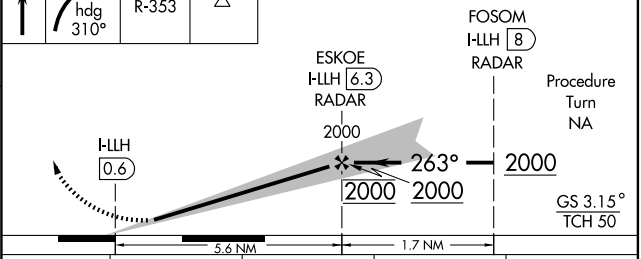

CATEGORY	A	B	C	D
S-ILS 26	288/40 250 (300-¾)			NA
S-LOC 26	700/40 662 (700-¾)		700/60 662 (700-1¼)	NA
CIRCLING	700-1 662 (700-1)		700-1¾ 662 (700-1¾)	NA