WAAS	APP CRS	Rwy Idg	6501
CH 86222	169°	TDZE	10
W17A		Apt Elev	36

RNAV (GPS) RWY 17

PHILADELPHIA INTL (PHL)

Inoperative table does not apply. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

MALSF

MISSED APPROACH: Climb to 3000 direct JEPUG and hold.

ATIS	PHILADELPHIA APP CON	PHILADELPHIA TOWER	GND CON	CLNC DEL
ARR 133.4	124.35 319.15	118.5 327.05 (Rwys 9L/27R, 8/26 and 17/35)	121.9 348.6	118.85 348.6
DEP 135.925		135.1 327.05 (Rwy 9R/27L)		

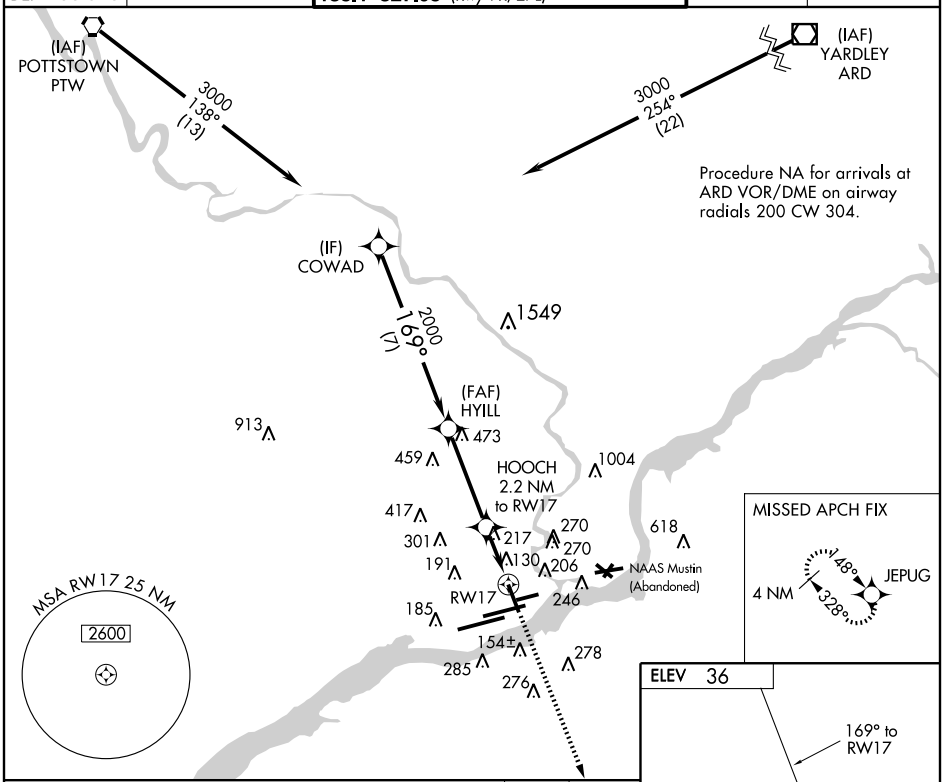

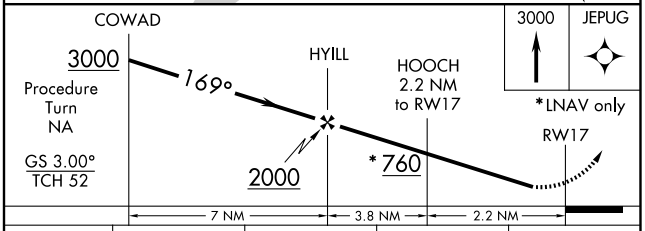

CATEGORY	A	B	C	D
LPV DA	322/50		312 (300-1)	
LNAV/VNAV DA	634-2¼		624 (600-2¼)	
LNAV MDA	480/50	470 (500-1)	480/60 470 (500-1¼)	480-1½ 470 (500-1½)
CIRCLING	540-1 504 (600-1)	640-1 604 (700-1)	640-1¾ 604 (700-1¾)	640-2 604 (700-2)

REIL Rwys 9L and 35
TDZ/CL Rwy 9R
HIRL all Rwys

NE-4, 19 NOV 2009 to 17 DEC 2009
NE-4, 19 NOV 2009 to 17 DEC 2009