RNAV (GPS) RWY 9L

MIAMI/ KENDALL-TAMIAMI EXECUTIVE (TMB)

WAAS CH 99415 W09B	APP CRS 093°	Rwy ldg 5003 TDZE 8 Apt Elev 8

Circling to Rwy 13 NA at night. Baro-VNAV NA when using Miami Intl altimeter setting. For uncompensated Baro-VNAV systems, procedure NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Miami Intl altimeter setting and increase all DA 27 feet and all MDA 40 feet; increase LPV all Cats visibility ¼ mile, LNAV Cat C visibility ¼ mile, and Circling Cat D visibility ¼ mile.

MISSED APPROACH: Climb to 2000 direct HOTMA and hold.

ATIS	MIAMI APP CON	TAMIAMI TOWER ★	GND CON	CLNC DEL
124.0	125.5 354.1	118.9 (CTAF) L	121.7	133.0

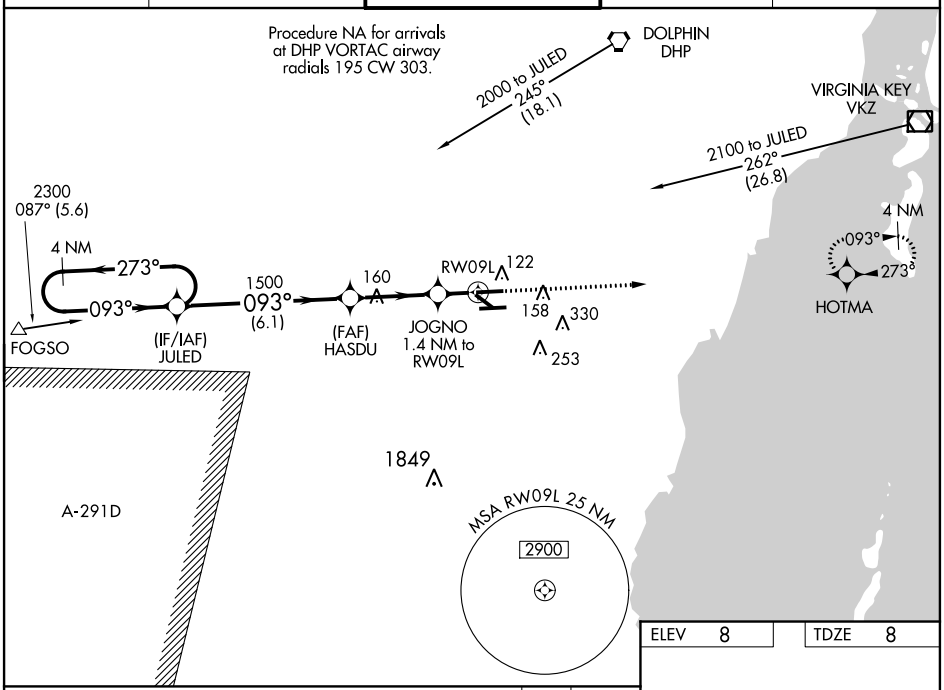

ELEV	8	TDZE	8

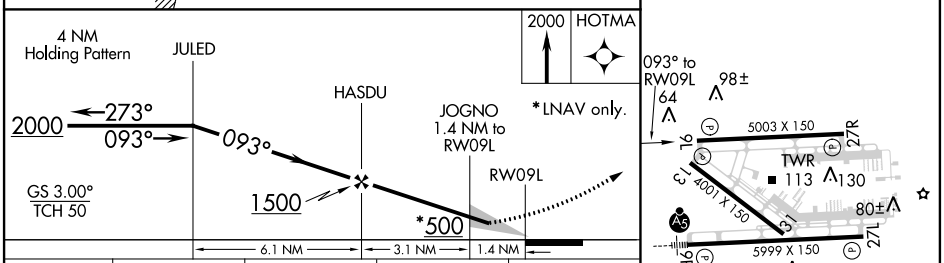

CATEGORY	A	B	C	D
LPV DA	258-¾ 250 (300-¾)			
LNAV/ VNAV DA	364-1¼ 356 (400-1¼)			
LNAV MDA	380-1 372 (400-1)			380-1¼ 372 (400-1¼)
CIRCLING	460-1 452 (500-1)		460-1½ 452 (500-1½)	640-2 632 (700-2)

REIL Rwy 13
HIRL Rwy 9R-27L L
MIRL Rwys 9L-27R and 13-31

SE-3, 12 DEC 2013 to 09 JAN 2014

SE-3, 12 DEC 2013 to 09 JAN 2014