APP CRS	Rwy Idg	10996
123°	TDZE	2599
	Apt Elev	2643

RNAV (RNP) Y RWY 11L

TUCSON INTL (TUS)

V NA — For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 43°C (111°F). For inoperative MALSR, increase RNP 0.30 visibility to RVR 6000 all Cats. GPS required.

MALSR

MISSED APPROACH: Climb to 6000 via 123° track to CURGA, 213° track to REBDE, 303° track to TOYOP and hold.

ATIS	TUCSON APP CON	TUCSON TOWER	GND CON	CLNC DEL
123.8 279.65	119.4 318.1	118.3 257.8	124.4 348.6	126.65 326.2

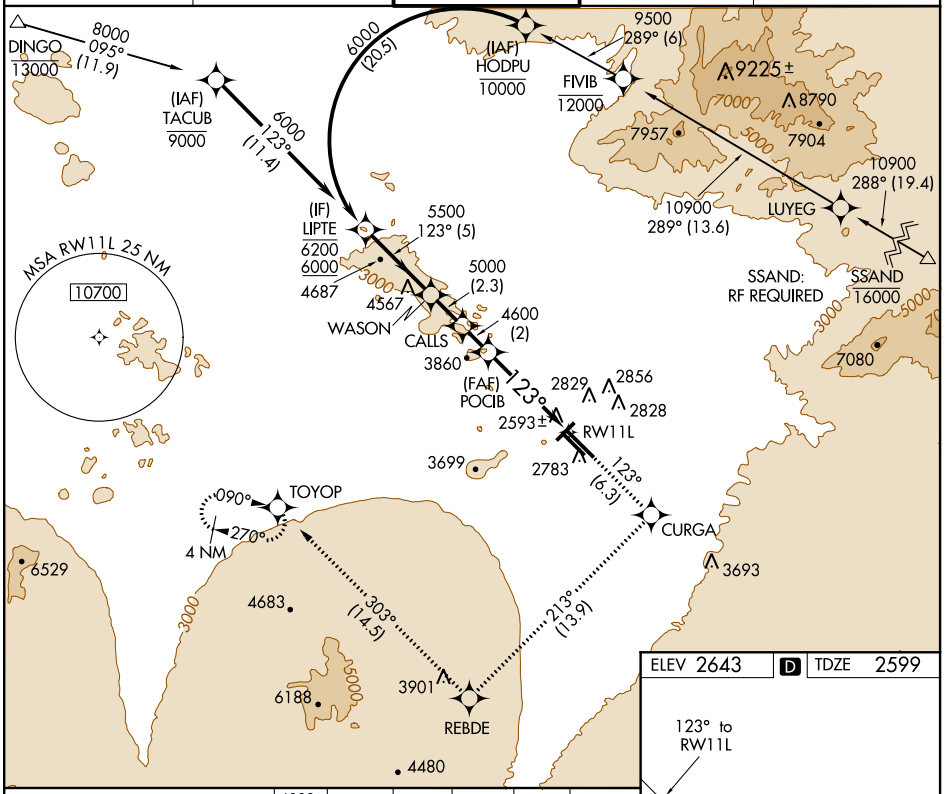

	LIPTE	WASON	CALLS	POCIB	RW11L
	6200 / 6000	123°	5500	5000	4600
	Procedure Turn NA			4600	
	GP 3.00° TCH 55				
	5 NM	2.3 NM	2 NM	6.1 NM	

	6000 123° tr	CURGA	213° tr	REBDE	303° tr	TOYOP

CATEGORY	A	B	C	D
RNP 0.30 DA	2947/40 348 (400-¾)			

AUTHORIZATION REQUIRED

ELEV 2643 D TDZE 2599



HIRL Rwy 11L-29R
MIRL Rwys 3-21 and 11R-29L
REIL Rwys 21, 29L and 29R

SW-4, 08 JAN 2015 to 05 FEB 2015
SW-4, 08 JAN 2015 to 05 FEB 2015