

WAAS CH 81910 W23A	APP CRS 233°	Rwy ldg 7543 TDZE 710 Apt Elev 716
--	------------------------	---

RNAV (GPS) RWY 23L


WILLOW RUN (YIP)

▽ Inoperative table does not apply to LPV. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). For inop MALSR, increase visibility LNAV/VNAV all Cats to ¾ mile and LNAV Cat A/B to 1 mile, Cat C/D to 1½ mile. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.



MISSED APPROACH:
Climb to 3000 direct ZAVEX and hold.



ATIS 127.425	DETROIT APP CON 118.95 363.2	WILLOW RUN TOWER 125.275 256.9	GND CON 121.925
------------------------	--	--	---------------------------

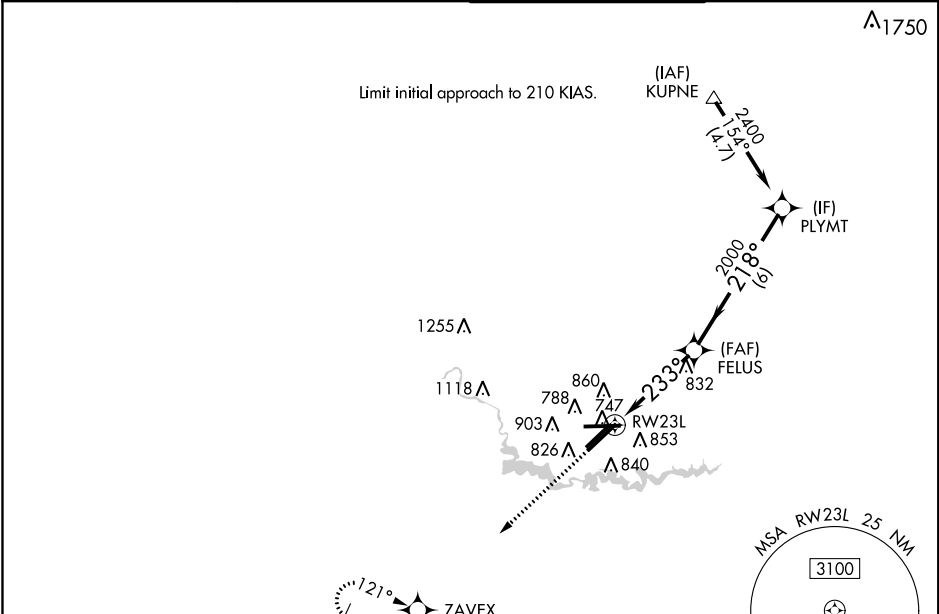

EC-1, 22 JUN 2017 to 20 JUL 2017

EC-1, 22 JUN 2017 to 20 JUL 2017

ELEV 716	D	TDZE 710
----------	----------	----------

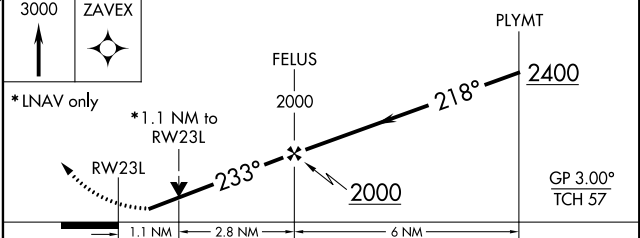

CATEGORY	A	B	C	D
LPV DA		959-¾	249 (300-¾)	
LNAV/VNAV DA		974-¾	264 (300-¾)	
LNAV MDA		1100-¾	390 (400-¾)	
C CIRCLING	1220-1	504 (600-1)	1220-1½ 504 (600-1½)	1400-2½ 684 (700-2½)

TDZ/CL Rwy 5R
HIRL Rwy 5R-23L
MIRL Rwy 5L-23R, and 9-27