WAAS	APP CRS	Rwy Idg	9802
CH 48808	285°	TDZE	143
W28A		Apt Elev	143

BALTIMORE/ WASHINGTON INTL THURGOOD MARSHALL (BWI) RNAV (GPS) Y RWY 28

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C (11°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.
For inoperative MALSR, increase LNAV/VNAV all Cats visibility to RVR 4500.
**RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 2500 direct COLUM and hold.

D-ATIS	POTOMAC APP CON		BALTIMORE TOWER	GND CON	CLNC DEL
115.1 127.8	119.0 282.275 (020°-100°) 119.7 290.475 (131°-180°)		119.4 257.8	121.9	118.05
	124.55 317.425 (101°-130°) 128.7 307.9 (181°-019°)				

CPDLC

RADAR REQUIRED

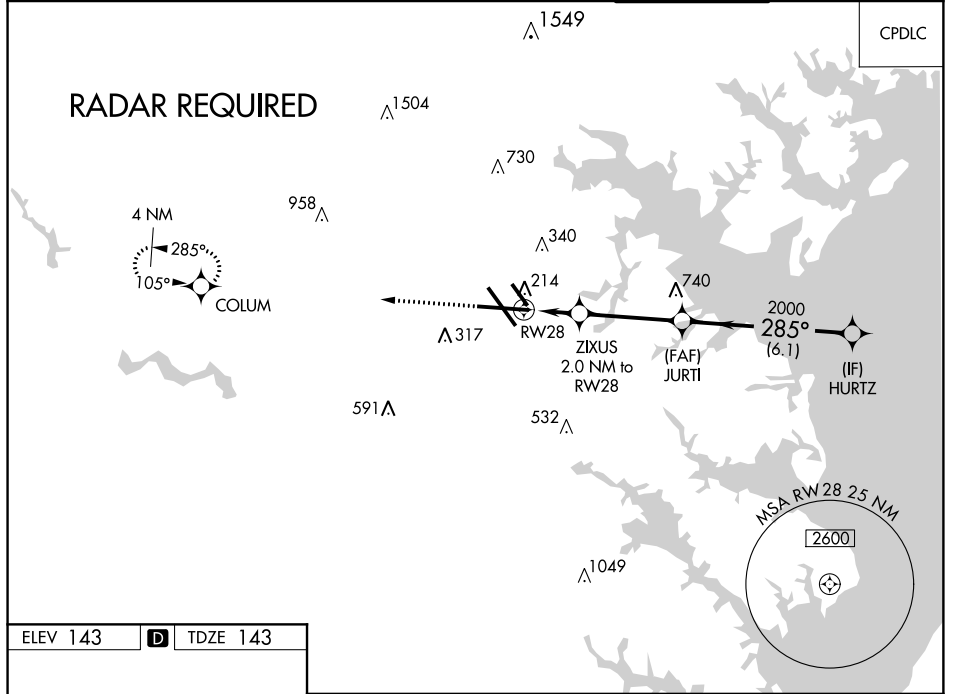

ELEV 143 D TDZE 143



TDZ/CL Rwys 10 and 33L
REIL Rwys 15L and 33R
HIRL all rwys

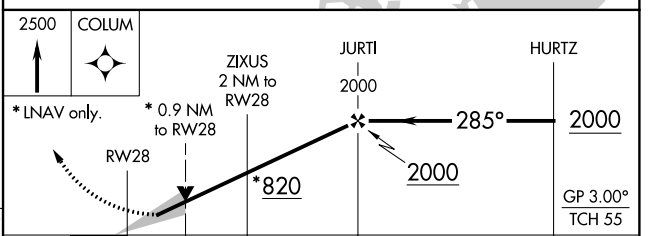

CATEGORY	A	B	C	D
LPV DA	**343/24 200 (200-½)			
LNAV/VNAV DA	393/24 250 (300-½)			
LNAV DA	480/24 337 (400-½)		480/26 337 (400-⅝)	
C CIRCLING	640-1 497 (500-1)	660-1 517 (600-1)	700-1½ 557 (600-1½)	860-2¼ 717 (800-2¼)

NE-3, 01 MAR 2018 to 29 MAR 2018