| LOC I-ECC | APP CRS | Rwy Idg | 8653 |
|---|---|---|---|
| 110.1 | 200° | TDZE | 5605 |
| | | Apt Elev | 5622 |

# ILS or LOC RWY 20

CEDAR CITY RGNL(CDC)

DME required.

T NA XOJPO fix minimums (Dual VOR receivers required): For inop ALS, increase S-LOC 20 Cats C/D visibility to 1⅜ SM. For inop ALS, increase S-LOC 20 Cats C/D visibility to 2½ SM.

#For inop ALS, increase S-ILS 20 visibility all Cats to 1 SM.

MALSR

MISSED APPROACH: Climb to 6200 then climbing right turn to 10000 on heading 322° and on EHK R-278 to BERYL INT/EHK 16.5 DME and hold, continue climb-in-hold to 10000.

†Missed approach requires minimum climb of 210 feet per NM to 7300.

| ASOS | SALT LAKE CITY CENTER | UNICOM |
|---|---|---|
| 119.025 | 125.575 379.275 | 123.0 (CTAF) L |

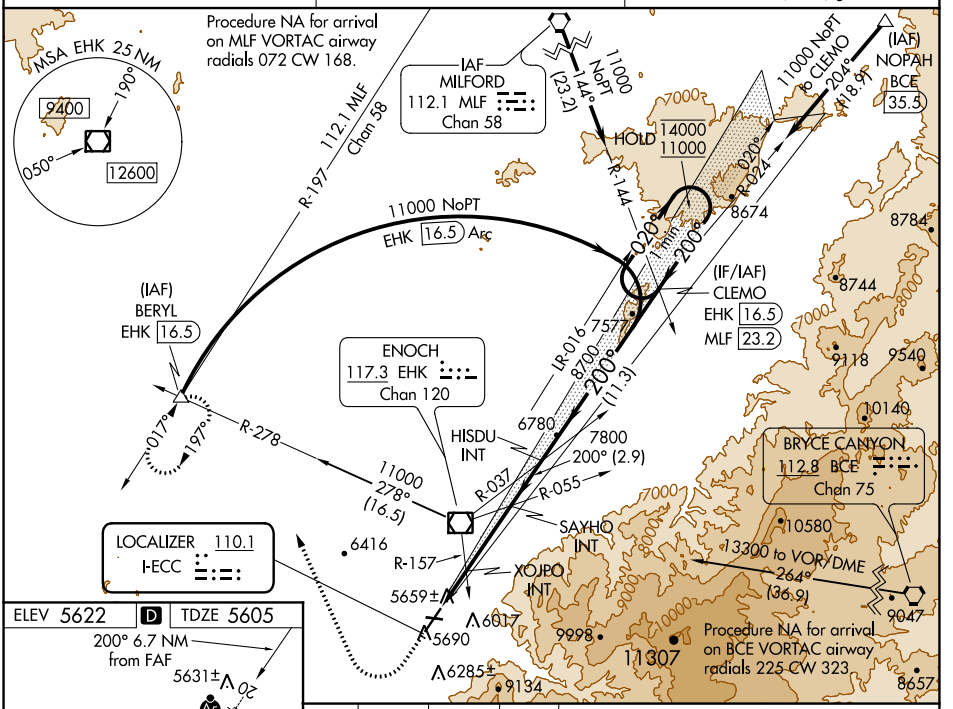


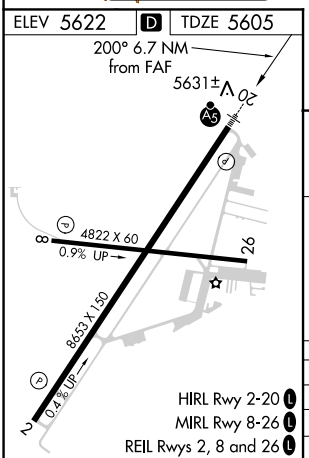


| FAF to MAP 6.7 NM | | | | | |
|---|---|---|---|---|---|
| Knots | 60 | 90 | 120 | 150 | 180 |
| Min:Sec | 6:42 | 4:28 | 3:21 | 2:41 | 2:14 |

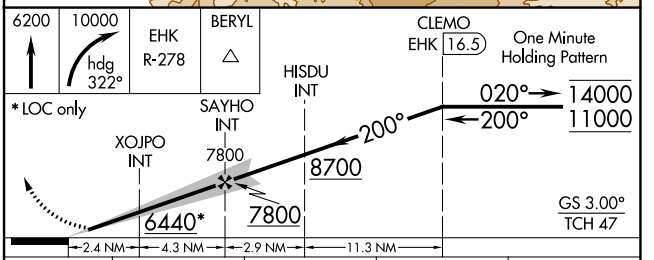


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| S-ILS 20† | 5825-½ 220 (300-½) | | | |
| S-ILS 20# | 5882-½ 277 (300-½) | | | |
| S-LOC 20 | 6440-½ 835 (900-½) | 6440-¾ 835 (900-¾) | 6440-1⅞ 835 (900-1⅞) | |
| XOJPO FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED | | | | |
| S-LOC 20 | 6100-½ 495 (500-½) | | 6100-1 495 (500-1) | |


SW-4, 20 MAY 2021 to 17 JUN 2021