

KIAWAH ONE DEPARTURE (RNAV)


SE-2, 26 MAR 2020 to 23 APR 2020

ATIS 124.75
CINC DEL 119.85
GND CON 121.9 348.6
CTAF 122.8
CHARLESTON DEP CON 120.7 306.925

TAKEOFF MINIMUMS:

Rwys 4, 9, 27: ATC climb of 500' per NM to 520.
Rwy 22: Standard with minimum climb of 245' per NM to 520. ATC climb of 500' per NM to 520.

- NOTE: Transponder code will be issued by Charleston clearance delivery.
- NOTE: If unable to accept climb rate, advise ATC on initial contact.
- NOTE: GPS required.
- NOTE: RNAV 1.

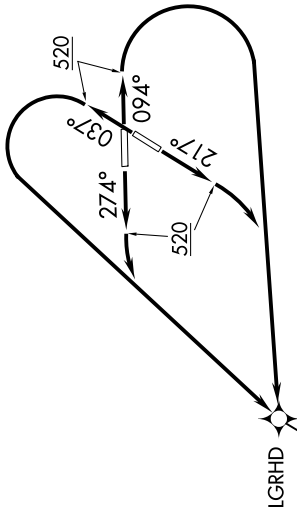

DEPARTURE ROUTE DESCRIPTION

- TAKEOFF RWY 4: Climb heading 037° to 520 MSL, then left turn direct LGRHD, thence. . . .
- TAKEOFF RWY 9: Climb heading 094° to 520 MSL, then right turn direct LGRHD, thence. . . .
- TAKEOFF RWY 22: Climb heading 217° to 520 MSL, then right turn direct LGRHD, thence. . . .
- TAKEOFF RWY 27: Climb heading 274° to 520 MSL, then left turn direct LGRHD, thence. . . .
- . . . via assigned transition/route, maintain 2000. Expect clearance to filed altitude/flight level within ten (10) minutes after departure.

MILIE TRANSITION (KIAWA1.MILIE)

4000
*2400
216°
(88)

MILIE

NOTE: Chart not to scale.

SE-2, 26 MAR 2020 to 23 APR 2020