RNAV (GPS) RWY 3

PHOENIX GOODYEAR (GYR)

WAAS CH 42839 W03A	APP CRS 030°	Rwy Idg 8500 / TDZE 954 / Apt Elev 969

RNP APCH.

NA — Procedure NA at night. Helicopter visibility reduction below ¾ SM NA. VDP NA when using Phoenix Sky Harbor Intl altimeter setting. When local altimeter setting not received, use Phoenix Sky Harbor Intl altimeter setting: increase all MDA 80 feet and visibility LP/LNAV Cat C/D and Circling Cat C ¼ SM.

MISSED APPROACH: Climb to 1900 then climbing left turn to 4000 direct TATUY and hold.

ATIS	LUKE APP CON ★	GOODYEAR TOWER ★	GND CON	UNICOM
118.35	125.45 263.125	120.1 (CTAF) 239.3	121.7	122.95

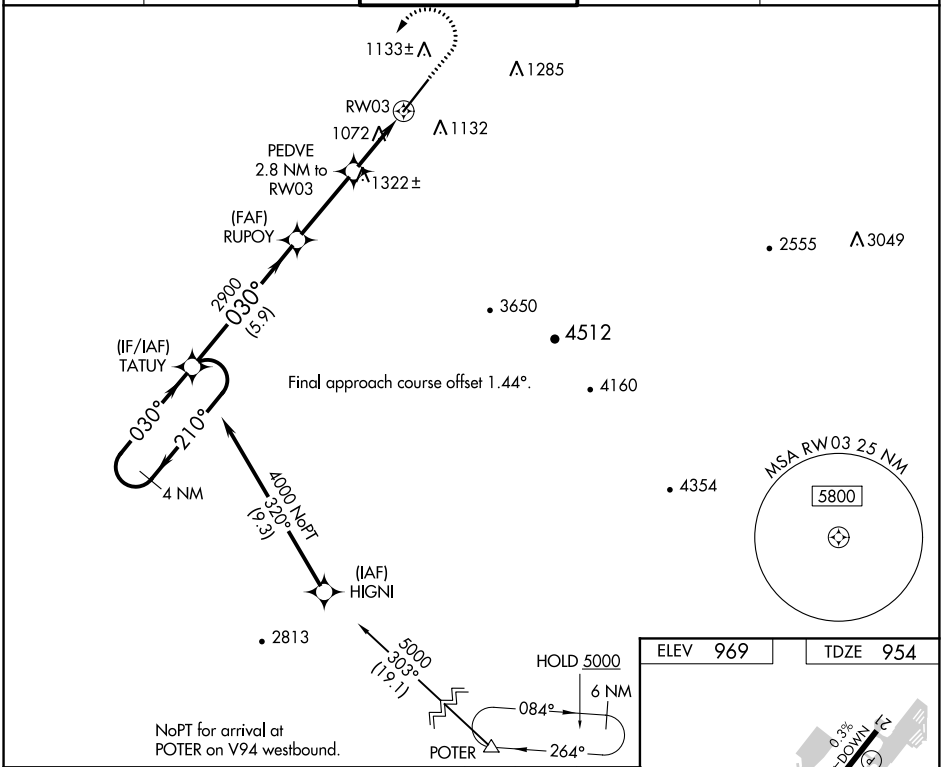

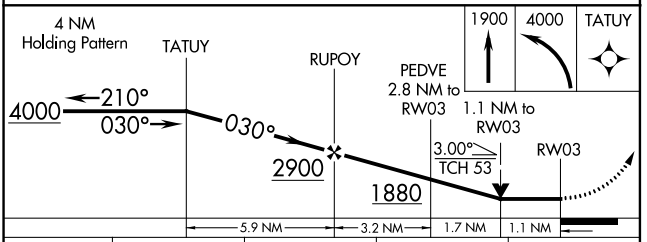

CATEGORY	A	B	C	D
LP MDA	1340-1	386 (400-1)	1340-1⅛	386 (400-1⅛)
LNAV MDA	1580-1	626 (700-1)	1580-1¾	626 (700-1¾)
C CIRCLING	1580-1	611 (700-1)	1860-2¾ 891 (900-2¾)	1920-3 951 (1000-3)

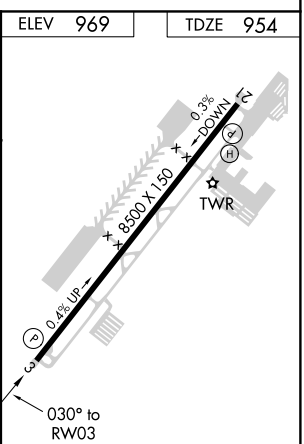

REIL Rwys 3 and 21
MIRL Rwy 3-21

SW-4, 21 MAY 2020 to 18 JUN 2020
SW-4, 21 MAY 2020 to 18 JUN 2020