

LOC I-MRNR	APP CRS	Rwy Idg	5500
111.1	031°	TDZE	1248
		Apt Elev	1270



LOC RWY 3

FOOTHILLS RGNL (MRNR)

ADF Required. When local altimeter setting not received, use Hickory altimeter setting and increase all MDA 40 feet, increase S-3 Cat C visibility ¼ mile and Circling Cat C visibility ½ mile.


MISSED APPROACH: Climb to 3200 then climbing left turn to 5000 direct FIQ NDB and hold.

AWOS-3P 124.175	ATLANTA CENTER 125.15 263.0	UNICOM 122.7 (CTAF) 0
---------------------------	---------------------------------------	---------------------------------

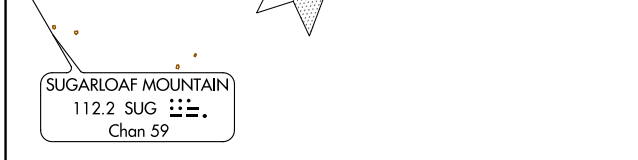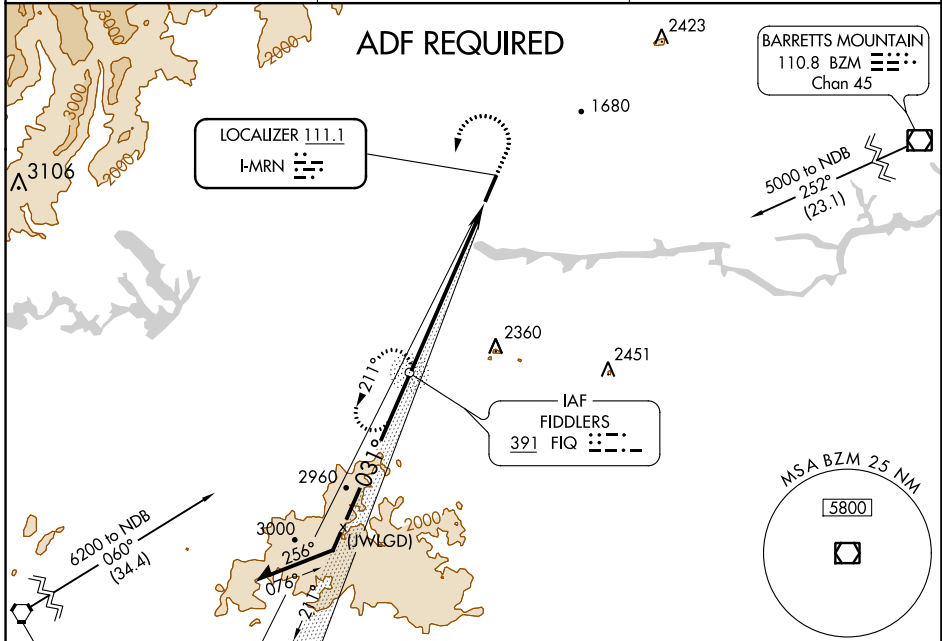

ELEV 1270	TDZE 1248
-----------	-----------

MIRL Rwy 3-21
REIL Rwys 3 and 21

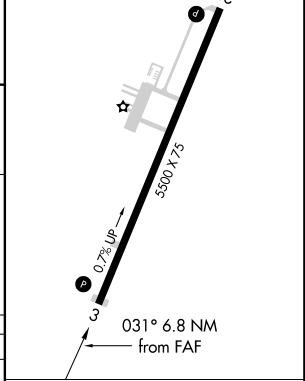

CATEGORY	Remain within 10 NM		FIQ NDB
	A	B	C
S-3	1740-1	492 (500-1)	1740-1 3/8 492 (500-1 3/8)
CIRCLING	1740-1 470 (500-1)	1760-1 490 (500-1)	1760-1 1/2 490 (500-1 1/2)

FAF to MAP 6.8 NM	Knots	60	90	120	150	180
	Min:Sec	6:48	4:32	3:24	2:43	2:16

SE-2: 16 AUG 2018 to 13 SEP 2018

SE-2: 16 AUG 2018 to 13 SEP 2018

WAAS CH 40322 W21A	APP CRS 211°	Rwy Idg TDZE Apt Elev	5500 1270 1270
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 21

FOOTHILLS RGNL (MRN)


⚠ Baro-VNAV NA when using Hickory altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 35°C (95°F).
⚠ DME/DME RNP-0.3 NA. VDP NA with Hickory altimeter setting. When local altimeter setting not received use Hickory altimeter setting and increase all DA 39 feet and all MDA 40 feet; increase LPV all Cats visibility ¼ mile, increase LNAV/VNAV all Cats visibility ⅓ mile and increase LNAV Cats C and D visibility ¼ mile.

MISSED APPROACH: Climb to 2000 then climbing right turn to 4400 direct CIKIS and hold.




AWOS-3P 124.175	ATLANTA CENTER 125.15 263.0	UNICOM 122.7 (CTAF) 0
---------------------------	---------------------------------------	---------------------------------



Procedure NA for arrivals at GOWBE on V259 Southeast bound.



ELEV 1270	TDZE 1270
-----------	-----------

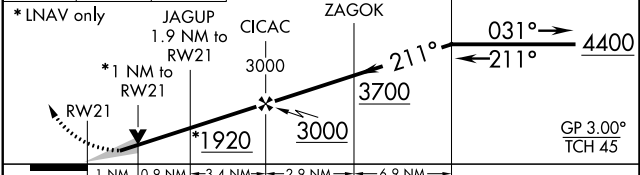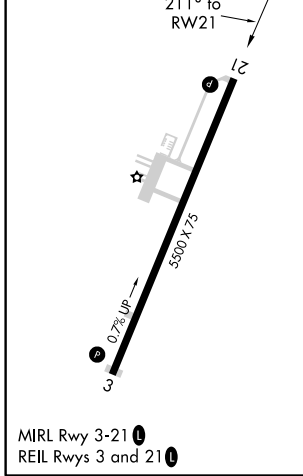

CATEGORY	A	B	C	D
LPV DA		1520-¾	250 (300-¾)	
LNAV/VNAV DA		1600-1½	330 (400-1½)	
LNAV MDA	1680-1	410 (500-1)	1680-1½	410 (500-1½)
CIRCLING	1720-1 450 (500-1)	1760-1 490 (500-1)	1760-1½ 490 (500-1½)	1840-2 570 (600-2)

SE-2. 16 AUG 2018 to 13 SEP 2018

SE-2. 16 AUG 2018 to 13 SEP 2018

WAAS CH 69322 W03A	APP CRS 031°	Rwy Idg TDZE 1248 Apt Elev 1270	5500
--	------------------------	---	-------------


RNAV (GPS) RWY 3

FOOTHILLS RGNL (MRN)


Baro-VNAV NA when using Hickory altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 36°C (96°F). DME/DME RNP-0.3 NA.
VDP NA with Hickory altimeter setting. When local altimeter setting not received use Hickory altimeter setting and increase all DA 39 feet and all MDA 40 feet; increase LNAV/VNAV all Cats visibility 1/8 mile and increase LNAV Cats C and D visibility 1/8 mile.

MISSED APPROACH:
Climb to 4800 direct CIKIS and hold.


AWOS-3P 124.175	ATLANTA CENTER 125.15 263.0	UNICOM 122.7 (CTAF)
---------------------------	---------------------------------------	-------------------------------

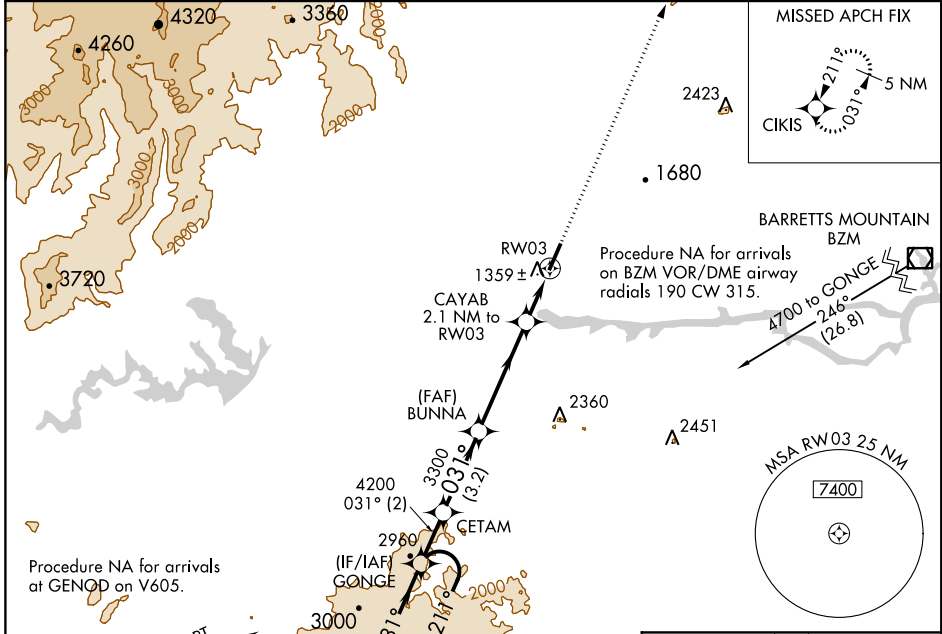


Procedure NA for arrivals at GENOD on V605.
 (IF/IAF) GENOD 4700 NoPT 073° (12.8)
 (FAF) BUNNA 3300 031° (3.2)
 (IF/IAF) GONGE 2960 031° (2.1)
 4200 031° (2)
 3000
 211°
 5 NM

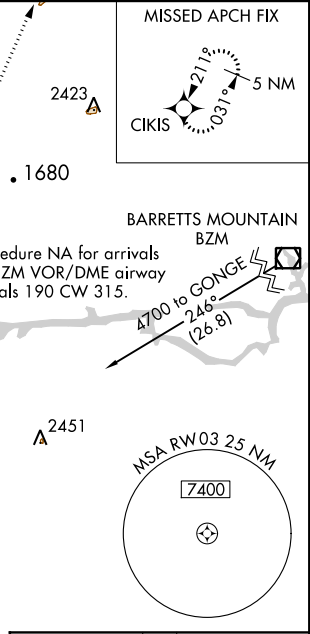

ELEV 1270	TDZE 1248
MIRL Rwy 3-21	
REIL Rwy 3 and 21	

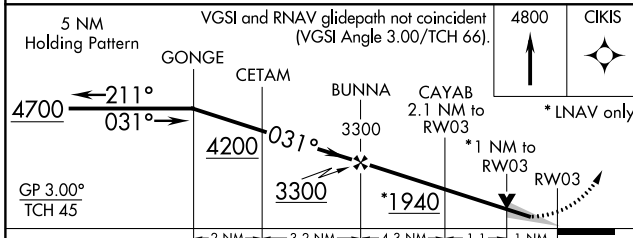

CATEGORY	A	B	C	D
LPV DA		1498-1	250 (300-1)	
LNAV/VNAV DA		1558-1 1/8	310 (300-1 1/8)	
LNAV MDA		1620-1	372 (400-1)	
CIRCLING	1720-1 450 (500-1)	1760-1 490 (500-1)	1760-1 1/2 490 (500-1 1/2)	1840-2 570 (600-2)

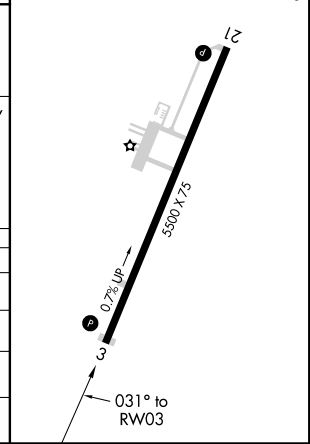

SE-2, 16 AUG 2018 to 13 SEP 2018

SE-2, 16 AUG 2018 to 13 SEP 2018