ILS or LOC Y RWY 6

NEW RIVER VALLEY (PSK)

LOC I-PSK	APP CRS	Rwy Idg	6201
110.9	058°	TDZE	2105
		Apt Elev	2105

DME required.

T NA — When local altimeter setting not received, use Blacksburg altimeter setting and increase all DA 36 feet, and all MDA 40 feet. Inop table does not apply to S-ILS 6 all Cats and S-LOC 6 Cats A and B. For inop MALSR, increase S-LOC 6 Cat C visibility to 1¼ SM.

MALSR (A5)

MISSED APPROACH: Climb to 3000 then climbing right turn to 5000 direct PSK VORTAC and hold.

AWOS-3	ROANOKE APP CON	ROANOKE CLNC DEL	UNICOM
127.375	126.0 339.8	121.7	122.7 (CTAF) L

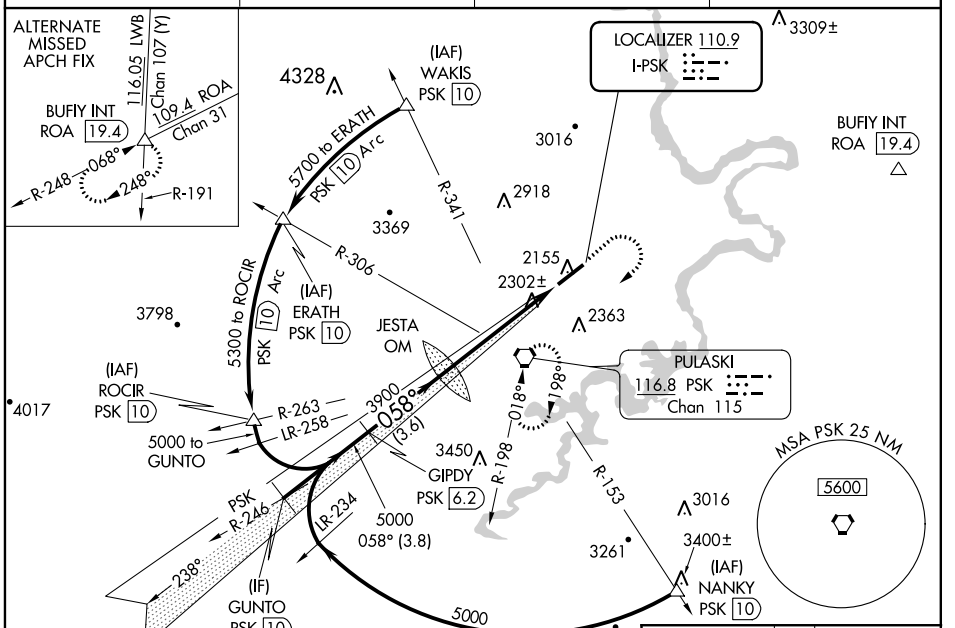

DME REQUIRED

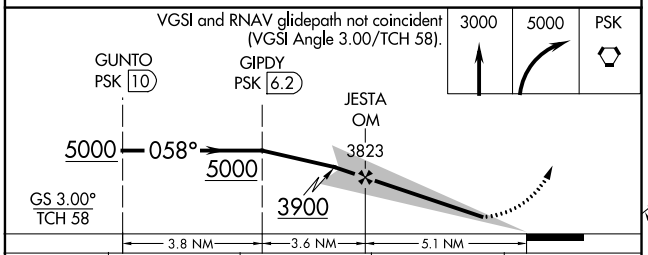

CATEGORY	A	B	C	D
S-ILS 6	2305-1 200 (200-1)			
S-LOC 6	2560-1 455 (500-1)			
CIRCLING	2620-1 515 (600-1)		2620-1½ 515 (600-1½)	2680-2 575 (600-2)

ELEV 2105 TDZE 2105

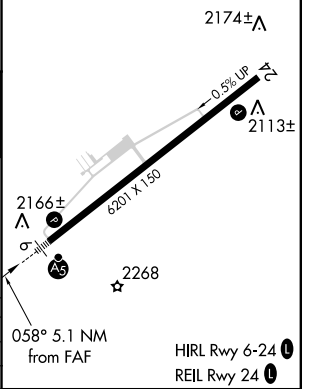

HIRL Rwy 6-24 L

REIL Rwy 24 L

FAF to MAP 5.1 NM						
Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

NE-3, 03 DEC 2020 to 31 DEC 2020