WAAS CH 50231 W05A	APP CRS 047°	Rwy Idg 5000 TDZE 429 Apt Elev 441

RNAV (GPS) RWY 5

NORTH CENTRAL STATE (SFZ)

Circling Rwy 15, 33 NA at night. Baro-VNAV NA when using Providence altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (4°F) or above 54°C (130°F). For inoperative MALS, increase LPV all Cats visibility to ⅞ mile. DME/DME RNP-0.3 NA. VDP NA with Providence altimeter setting. When local altimeter setting not received, use Providence altimeter setting and increase all DA 82 feet and all MDA 100 feet; increase LPV all Cats visibility ⅛ mile, increase LNAV/VNAV all Cats and LNAV Cat C visibility ¼ mile. For inoperative MALS, when using Providence altimeter setting increase LPV all Cats visibility to 1 mile.

MALS

MISSED APPROACH: Climb to 2000 then climbing left turn to 2500 direct FOSTY and hold.

AWOS-3PT	PROVIDENCE APP CON ★	CLNC DEL	UNICOM
120.775	123.675 244.875	124.35	123.075 (CTAF) L

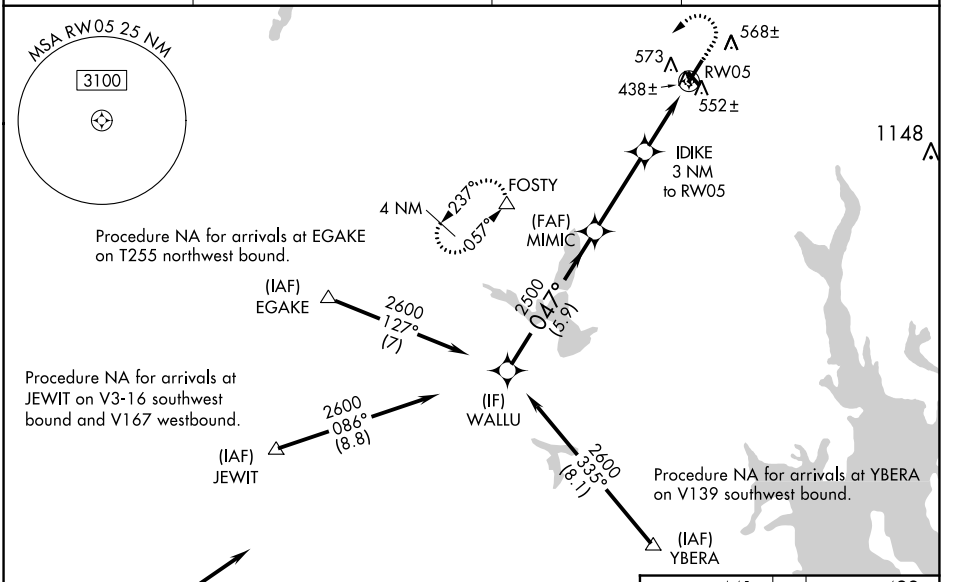

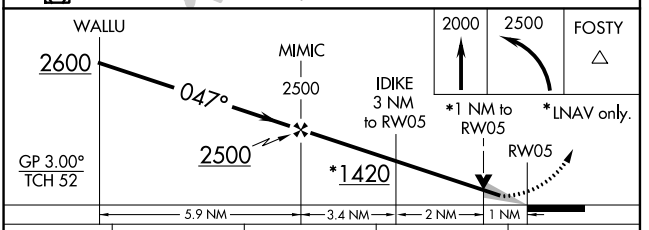

CATEGORY	A	B	C	D
LPV DA	700-¾ 271 (300-¾)			NA
LNAV/VNAV DA	835-1⅛ 406 (400-1⅛)			NA
LNAV MDA	800-¾ 371 (400-¾)		800-⅞ 371 (400-⅞)	NA
C CIRCLING	900-1 459 (500-1)		900-1½ 459 (500-1½)	NA

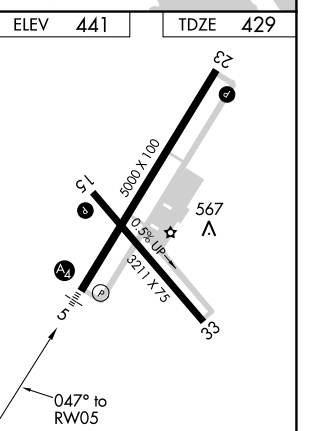

HIRL Rwy 5-23 L
MIRL Rwy 15-33 L
REIL Rwys 15, 23 and 33 L

NE-1, 09 SEP 2021 to 07 OCT 2021
NE-1, 09 SEP 2021 to 07 OCT 2021